

aiwa



HV-N15

VIDEO CASSETTE PLAYER

• BASIC VIDEO MECHANISM: K-N2EPN206P-C

• TYPE: D

SIMPLE MANUAL

• Replace this Service Manual with "Revision Publishing" when it is issued.

S/M Code No. 09-98A-305-50A

MANUAL
SERVICE

ELECTRICAL PARTS LIST-1/6

NOTE: The characters in the suffix column indicate the part usage.

ST	REF.NO	PARTS NO.	NO.	DESCRIPTION	SUFFIX
.....			OO.....		B.....
			KANRI		
			NO.		
		85-JPC-205-110	0E	HLDR,LED SENDOR
		85-JPC-206-110	0E	HLDR,T/E SENSOR
		87-067-579-010	0E	TAPPING SCREW, BVT2+3-8
		87-A80-091-010	1C	AC CORD ASSY,D BLK
		88-909-121-110	0E	FF-CABLE,9P 12CM
C	4	87-016-099-090	1C	CAP,E 100-200 SME
C	1	87-A10-374-010	1A	CAP,M/P 0.1-275 K RMR
C	9	87-A10-413-010	0E	CAP,CER 2200P-4K M E KX
C	5	87-A10-892-080	0E	CAP,CER 68P-1K J SL
C	13	87-A10-895-080	1A	CAP,E 1000-10 M PJ
C	12	87-A10-896-090	1B	CAP,E 820-16 M PJ
C	21	87-010-983-010	0E	CAP,CER 0.01-500 KB
C	22	87-A10-596-080	0E	C-CAP,S 100P-100 J CH
C	23	87-A10-843-080	0E	CAP,CER 680P-1K K R
C	106	87-010-073-080	0E	CAP,E 3.3-50 5L
C	104	87-010-151-080	0E	C-CAP,S 7P-50 CH
C	108	87-010-316-080	0E	C-CAP,S 33P-50 CH
C	109	87-010-497-080	0E	CAP,E 4.7-35 5L
C	107	87-012-155-080	0E	C-CAP 180P-50CH
C	116	87-010-180-080	0E	C-CER 1500P
C	112	87-010-193-080	0E	CHIP CAPACITOR,0.033
C	111	87-016-461-080	0E	C-CAP,S 0.47-16F
C	120	87-010-198-080	0E	CAP,CHIP 0.022
C	123	87-010-311-080	0E	CAP 12P
C	124	87-010-316-080	0E	C-CAP,S 33P-50 CH
C	125	87-010-316-080	0E	C-CAP,S 33P-50 CH
C	126	87-018-116-080	0E	CAP, CER 56P-50V
C	149	87-010-317-080	0E	C-CAP,S 39P-50 CH
C	152	87-010-068-080	0E	CAP, ELECT 0.22-50
C	151	87-010-178-080	0E	CHIP CAP 1000P
C	156	87-010-320-080	0E	CHIP CAP 68P
C	154	87-010-321-080	0E	CHIP CAPACITOR,82P(J)
C	157	87-015-695-080	0E	CAP,E 1-50 7L
C	163	87-010-178-080	0E	CHIP CAP 1000P
C	164	87-010-198-080	0E	CAP,CHIP 0.022
C	161	87-015-677-080	0E	CAP,E 100-6.3 7L
C	162	87-018-214-080	0E	CAP TC U 0.1-50F
C	186	87-010-151-080	0E	C-CAP,S 7P-50 CH
C	187	87-010-316-080	0E	C-CAP,S 33P-50 CH
C	183	87-010-553-080	0E	CAP,E 47-16
C	180	87-012-157-080	0E	C-CAP,S 330P-50 CH
C	184	87-018-131-080	0E	CAP, CER 1000P-50V
C	185	87-018-134-080	0E	CAPACITOR,TC-U 0.01-16
C	309	87-010-805-080	0E	CAP, S 1-16
C	308	87-015-677-080	0E	CAP,E 100-6.3 7L
C	326	87-010-198-080	0E	CAP,CHIP 0.022
C	324	87-010-198-080	0E	CAP,CHIP 0.022
C	323	87-010-311-080	0E	CAP 12P
C	321	87-010-312-080	0E	C-CAP,S 15P-50 CH
C	329	87-010-315-080	0E	C-CAP,S 27P-50 CH
C	327	87-010-318-080	0E	C-CAP,S 47P-50 CH
C	331	87-010-182-080	0E	C-CAP,S 2200P-50 B
C	338	87-012-145-080	0E	CAP,CHIP S 270P CH
C	335	87-012-154-080	0E	C-CAP,S 150P-50 CH
C	339	87-012-155-080	0E	C-CAP 180P-50CH
C	342	87-010-198-080	0E	CAP,CHIP 0.022
C	359	87-010-178-080	0E	CHIP CAP 1000P
C	353	87-010-311-080	0E	CAP 12P
C	351	87-010-314-080	0E	C-CAP,S 22P-50V
C	352	87-010-315-080	0E	C-CAP,S 27P-50 CH
C	355	87-010-316-080	0E	C-CAP,S 33P-50 CH
C	357	87-010-320-080	0E	CHIP CAP 68P
C	354	87-010-320-080	0E	CHIP CAP 68P
C	367	87-010-322-080	0E	C-CAP,S 100P-50 CH
C	365	87-012-157-080	0E	C-CAP,S 330P-50 CH
C	362	87-012-157-080	0E	C-CAP,S 330P-50 CH
C	371	87-015-677-080	0E	CAP,E 100-6.3 7L
C	431	87-010-178-080	0E	CHIP CAP 1000P
C	459	87-010-175-080	0E	CAP 560P
C	453	87-010-180-080	0E	C-CER 1500P
C	454	87-010-186-080	0E	CAP,CHIP 4700P
C	458	87-010-264-080	0E	CAP,E 100-10 5L
C	455	87-010-415-080	0E	CAP ELE SRE 10-50V
C	462	87-010-244-080	0E	CAP ELECT 16-22
C	460	87-010-412-080	0E	CAP,E 10-25 5L
C	461	87-010-805-080	0E	CAP, S 1-16
C	605	87-010-154-080	0E	CAP CHIP 10P
C	606	87-010-154-080	0E	CAP CHIP 10P
C	609	87-010-178-080	0E	CHIP CAP 1000P
C	604	87-015-677-080	0E	CAP,E 100-6.3 7L
C	611	87-010-178-080	0E	CHIP CAP 1000P
C	610	87-010-178-080	0E	CHIP CAP 1000P
C	613	87-010-184-080	0E	CHIP CAPACITOR 3300P(K)
C	617	87-010-185-080	0E	C-CAP,S 3900P-50 B
C	614	87-010-196-080	0E	CHIP CAPACITOR,0.1-25
C	616	87-015-681-080	0E	CAP,E 10-16 7L

ELECTRICAL PARTS LIST-2/6

C	618	87-015-681-080	0E	CAP,E 10-16 7L
C	612	87-015-695-080	0E	CAP,E 1-50 7L
C	620	87-010-196-080	0E	CHIP CAPACITOR,0.1-25
C	628	87-010-196-080	0E	CHIP CAPACITOR,0.1-25
C	623	87-010-196-080	0E	CHIP CAPACITOR,0.1-25
C	622	87-010-805-080	0E	CAP, S 1-16
C	635	87-010-197-080	0E	CAP, CHIP 0.01 DM
C	637	87-010-197-080	0E	CAP, CHIP 0.01 DM
C	633	87-010-197-080	0E	CAP, CHIP 0.01 DM
C	632	87-010-197-080	0E	CAP, CHIP 0.01 DM
C	631	87-015-680-080	0E	CAP,E 47-10 7L
C	636	87-015-684-080	0E	CAP,E 47-16 7L
C	634	87-015-684-080	0E	CAP,E 47-16 7L
C	699	87-010-184-080	0E	CHIP CAPACITOR 3300P(K)
C	703	87-010-196-080	0E	CHIP CAPACITOR,0.1-25
C	702	87-010-196-080	0E	CHIP CAPACITOR,0.1-25
CN	301	87-A60-634-010	0E	CONN,4P V FEH-BT-V
CN	603	81-557-779-010	0E	CONN,2P IL-S
CN	604	87-099-197-010	0E	CONN, 9P 6216 V
CN	602	87-A60-260-010	0E	CONN,6P V TKC-G06P
CN	605	87-A60-582-010	0E	CONN,5P V BGE TKX-P05P-X1
CN	601	87-A60-583-010	1B	CONN,10P V TKC-G10P
CN	701	87-099-202-010	0E	CONN,9P 6216 H
CNA	402	88-JP9-624-110	1B	CONN ASSY,5P AC
CNA	602	88-JP6-623-010	1A	CONN ASSY,7P MOTOR
D	1	87-070-173-010	1A	DIODE,S1WBA60
D	7	87-A40-184-090	1A	DIODE,RK34(F)
D	5	87-A40-291-080	0E	DIODE,1N4148 (CPT)
D	2	87-A40-368-080	0E	DIODE,EG01C
D	6	87-A40-369-090	1A	DIODE,RN3Z
D	3	87-A40-559-080	1B	ZENER,P6KE110A-G23
D	321	87-A40-291-080	0E	DIODE,1N4148 (CPT)
D	322	87-A40-291-080	0E	DIODE,1N4148 (CPT)
D	402	87-A40-466-080	0E	ZENER,MTZJ2.7A
D	604	87-070-418-010	0E	LED,LN66A
D	603	87-A40-291-080	0E	DIODE,1N4148 (CPT)
D	602	87-A40-291-080	0E	DIODE,1N4148 (CPT)
D	605	87-A40-344-080	0E	ZENER,MTZJ6.2C
D	608	87-A40-553-080	0E	DIODE,1N4003 LES
D	607	87-A40-553-080	0E	DIODE,1N4003 LES
D	609	87-A40-553-080	0E	DIODE,1N4003 LES
D	706	87-017-350-080	0E	LED,SEL1550CM
D	707	87-017-350-080	0E	LED,SEL1550CM
D	709	87-017-350-080	0E	LED,SEL1550CM
D	705	87-017-350-080	0E	LED,SEL1550CM
D	708	87-017-350-080	0E	LED,SEL1550CM
D	703	87-017-733-080	0E	LED,SEL1250SM
D	710	87-017-350-080	0E	LED,SEL1550CM
D	711	87-017-350-080	0E	LED,SEL1550CM
D	712	87-017-350-080	0E	LED,SEL1550CM
F	1	87-035-401-010	0E	FUSE 1.6A-250V UL
FB	1	87-003-223-080	0E	FERRITE BEAD BL02RN2
FC	2	87-A90-505-080	0E	FUSE CLAMP,TP00351-51
FC	1	87-A90-505-080	0E	FUSE CLAMP,TP00351-51
IC	2	87-A20-649-080	1A	IC,HA17431VP
IC	1	88-JPH-616-010	1H	IC,TOP101Y
IC	101	87-A20-216-110	2M	C-IC,HA118201CF
IC	102	87-A20-463-040	1E	C-IC,MSM7476-76MS
IC	201	87-070-427-080	1A	IC,KIA78L05BP
IC	301	87-070-424-040	1C	IC,BA7180F
IC	451	87-070-391-040	1A	IC,BA4558F
IC	602	87-001-982-010	1B	IC,TA7291S
IC	601	88-JP6-611-010	2M	C-IC,M37776M5A-166GP
IC	702	87-070-083-010	1C	IC,GPIU281X
IC	701	87-070-289-040	1B	IC,BU 2092F
J	203	87-099-366-010	1A	JACK,2.5 LGK6501
J	201	87-A60-240-010	1A	JACK,PIN 2P Y/B HTJ-033
L	2	87-A50-180-080	0E	COIL,22UH K LHL10
L	3	87-A50-180-080	0E	COIL,22UH K LHL10
L	4	87-A50-180-080	0E	COIL,22UH K LHL10
L	101	87-003-282-080	0E	COIL,12UH
L	109	87-005-481-080	0E	COIL,47UH J FLR50
L	105	87-005-481-080	0E	COIL,47UH J FLR50
L	102	87-005-730-080	0E	COIL,10UH J SP02
L	104	87-005-736-080	0E	COIL,33UH J SP02
L	108	87-005-741-080	0E	COIL,82UH J SP02
L	181	87-005-740-080	0E	COIL,68UH J SP02
L	180	87-005-742-080	0E	COIL,100UH J SP02
L	201	87-005-738-080	0E	COIL,47UH J SP02
L	301	87-005-481-080	0E	COIL,47UH J FLR50
L	326	87-005-729-080	0E	COIL,8.2UH J SP02
L	323	87-005-730-080	0E	COIL,10UH J SP02
L	321	87-005-730-080	0E	COIL,10UH J SP02
L	324	87-005-731-080	0E	COIL,12UH J SP02
L	325	87-005-736-080	0E	COIL,33UH J SP02
L	322	87-005-741-080	0E	COIL,82UH J SP02
L	358	87-005-481-080	0E	COIL,47UH J FLR50
L	353	87-005-732-080	0E	COIL,15UH J SP02
L	351	87-005-734-080	0E	COIL,22UH J SP02
L	356	87-005-738-080	0E	COIL,47UH J SP02
L	352	87-005-738-080	0E	COIL,47UH J SP02
L	355	87-005-745-080	0E	COIL,180UH J SP02

ELECTRICAL PARTS LIST-3/6

L	359	87-005-746-080	0E	COIL,220UH J SP02
L	403	87-005-739-080	0E	COIL,56UH J SP02
L	602	87-005-481-080	0E	COIL,47UH J FLR50
L	601	87-005-481-080	0E	COIL,47UH J FLR50
LF	1	87-A90-869-010	1B	FLTR,LINE LF2020-333
PS	1	87-A90-717-010	1A	P-COUPLER,PC123FY2
PS	601	87-A90-834-010	1B	SNSR,SG-258S
PS	602	87-A90-834-010	1B	SNSR,SG-258S
PT	1	88-JP6-630-010	1E	PT,KER SWT
Q	3	89-109-340-480	0E	TR,2SA934Q
Q	1	89-109-521-080	0E	TR,2SA952 (0.6W)
Q	112	87-A30-063-080	0E	C-TR,KRA104S
Q	115	87-A30-063-080	0E	C-TR,KRA104S
Q	181	87-A30-061-080	0E	C-TR,KTA1504GR
Q	202	87-A30-061-080	0E	C-TR,KTA1504GR
Q	302	87-A30-061-080	0E	C-TR,KTA1504GR
Q	328	87-A30-063-080	0E	C-TR,KRA104S
Q	331	87-A30-061-080	0E	C-TR,KTA1504GR
Q	356	87-A30-062-080	0E	C-TR,KRC104S
Q	363	87-A30-062-080	0E	C-TR,KRC104S
Q	453	87-A30-062-080	0E	C-TR,KRC104S
Q	452	87-A30-062-080	0E	C-TR,KRC104S
Q	451	87-A30-063-080	0E	C-TR,KRA104S
Q	601	87-A30-060-080	0E	C-TR,KTC3875GR
Q	605	87-A30-060-080	0E	C-TR,KTC3875GR
Q	608	87-A30-060-080	0E	C-TR,KTC3875GR
Q	604	87-A30-060-080	0E	C-TR,KTC3875GR
Q	603	87-A30-060-080	0E	C-TR,KTC3875GR
Q	602	87-A30-061-080	0E	C-TR,KTA1504GR
Q	607	87-A30-141-010	0E	P-TR,PN268NC-R
Q	606	87-A30-141-010	0E	P-TR,PN268NC-R
R	8	87-A00-414-090	0E	RES,M/F 8.2-1W J RNS1X
R	11	87-022-629-080	0E	RES,M/F 11K-1/6WF
R	10	87-025-425-080	0E	RES,M/F 12K-1/6W F
R	12	87-A00-363-090	0E	RES,M/F 68K-2W J RSS2X
S	601	87-A90-873-080	0E	SW,TACT SKQNAJ
S	702	87-A90-164-080	0E	SW,TACT SKQAB(N)
S	706	87-A90-164-080	0E	SW,TACT SKQAB(N)
S	701	87-A90-164-080	0E	SW,TACT SKQAB(N)
S	707	87-A90-164-080	0E	SW,TACT SKQAB(N)
S	704	87-A90-164-080	0E	SW,TACT SKQAB(N)
S	703	87-A90-164-080	0E	SW,TACT SKQAB(N)
S	705	87-A90-164-080	0E	SW,TACT SKQAB(N)
SFR	601	87-024-177-080	0E	SEMI-FIXED RESISTER, 220K
TM	1	87-A60-317-010	0E	TERMINAL, 1P MSC
TM	2	87-A60-317-010	0E	TERMINAL, 1P MSC
X	102	86-JPS-614-080		VIB,XTAL 3.58MHZ
X	601	87-A70-090-080	1B	VIB,XTAL 16MHZ AT-49
C	7	87-A10-111-080	0E	CAP,E 47-10 SSL
C	19	87-016-574-080	0E	CAP,E 100-16 SSL
C	14	87-016-577-080	0E	CAP,E 470-16 SSL
C	16	87-016-577-080	0E	CAP,E 470-16 SSL
C	15	87-016-622-080	0E	CAP,E 470-10 SSL
C	18	87-016-624-080	0E	CAP,E 10-16 SSL
C	20	87-A10-112-080	0E	CAP,E 100-10 SSL
C	119	87-016-632-080	0E	CAP,E 0.47-50 SSL
C	113	87-016-634-080	0E	CAP,E 2.2-50 SSL
C	127	87-016-637-080	0E	CAP,E 10-50 SSL
C	131	87-016-630-080	0E	CAP,E 0.22-50 SSL
C	133	87-016-632-080	0E	CAP,E 0.47-50 SSL
C	136	87-016-634-080	0E	CAP,E 2.2-50 SSL
C	137	87-016-635-080	0E	CAP,E 3.3-50 SSL
C	135	87-016-637-080	0E	CAP,E 10-50 SSL
C	132	87-016-637-080	0E	CAP,E 10-50 SSL
C	130	87-A10-112-080	0E	CAP,E 100-10 SSL
C	143	87-016-635-080	0E	CAP,E 3.3-50 SSL
C	204	87-016-572-080	0E	CAP,E 470-6.3 SSL
C	201	87-016-574-080	0E	CAP,E 100-16 SSL
C	210	87-016-574-080	0E	CAP,E 100-16 SSL
C	211	87-A10-112-080	0E	CAP,E 100-10 SSL
C	341	87-016-637-080	0E	CAP,E 10-50 SSL
C	451	87-016-574-080	0E	CAP,E 100-16 SSL
C	457	87-016-637-080	0E	CAP,E 10-50 SSL
C	615	87-016-576-080	0E	CAP,E 330-16 SSL
C	619	87-A10-112-080	0E	CAP,E 100-10 SSL
C	629	87-016-582-080	0E	CAP,E 47-25 SSL
C	704	87-A10-112-080	0E	CAP,E 100-10 SSL
		85-JPC-205-110	0E	HLDR,LED SENDOR	AB.....
		85-JPC-206-110	0E	HLDR,T/E SENSOR	AB.....
		87-067-579-010	0E	TAPPING SCREW, BVT2+3-8	AB.....
		87-A80-091-010	1C	AC CORD ASSY,D BLK	.B.....
		87-A80-099-010	1C	AC CORD ASSY,NH BLK	A.....
		88-909-121-110	0E	FF-CABLE,9P 12CM	AB.....
C	7	87-010-374-080	0E	CAP, ELECT 47-10V	AB.....
C	4	87-016-099-090	1C	CAP,E 100-200 SME	.B.....
C	4	87-A10-003-090	1D	CAP,E 100-400 M SME	A.....
C	1	87-A10-374-010	1A	CAP,M/P 0.1-275 K RMR	AB.....
C	9	87-A10-413-010	0E	CAP,CER 2200P-4K M E KX	AB.....
C	5	87-A10-892-080	0E	CAP,CER 68P-1K J SL	AB.....
C	19	87-010-112-080	0E	CAP, ELECT 100-16V	AB.....
C	15	87-010-221-080	0E	CAP, ELECT 470-10V	AB.....
C	14	87-010-235-080	0E	CAP,E 470-16 SME	AB.....

ELECTRICAL PARTS LIST-4/6

C	16	87-010-235-080	0E	CAP,E 470-16 SME	AB.....
C	18	87-010-378-080	0E	CAP, ELECT 10-16V	AB.....
C	13	87-A10-895-080	1A	CAP,E 1000-10 M PJ	AB.....
C	12	87-A10-896-090	1B	CAP,E 820-16 M PJ	AB.....
C	21	87-010-983-010	0E	CAP,CER 0.01-500 KB	AB.....
C	22	87-A10-596-080	0E	C-CAP,S 100P-100 J CH	AB.....
C	23	87-A10-843-080	0E	CAP,CER 680P-1K K R	AB.....
C	106	87-010-073-080	0E	CAP,E 3.3-50 5L	AB.....
C	104	87-010-151-080	0E	C-CAP,S 7P-50 CH	AB.....
C	108	87-010-316-080	0E	C-CAP,S 33P-50 CH	AB.....
C	109	87-010-497-080	0E	CAP,E 4.7-35 5L	AB.....
C	107	87-012-155-080	0E	C-CAP 180P-50CH	AB.....
C	116	87-010-180-080	0E	C-CER 1500P	AB.....
C	112	87-010-193-080	0E	CHIP CAPACITOR,0.033	AB.....
C	119	87-010-400-080	0E	CAP, ELECT 0.47-50V	AB.....
C	113	87-010-402-080	0E	CAP, ELECT 2.2-50V	AB.....
C	111	87-016-461-080	0E	C-CAP,S 0.47-16F	.B.....
C	120	87-010-198-080	0E	CAP, CHIP 0.022	AB.....
C	123	87-010-311-080	0E	CAP 12P	AB.....
C	125	87-010-316-080	0E	C-CAP,S 33P-50 CH	AB.....
C	124	87-010-316-080	0E	C-CAP,S 33P-50 CH	AB.....
C	127	87-010-405-080	0E	CAP, ELECT 10-50V	AB.....
C	126	87-018-116-080	0E	CAP, CER 56P-50V	AB.....
C	133	87-010-400-080	0E	CAP, ELECT 0.47-50V	AB.....
C	136	87-010-402-080	0E	CAP, ELECT 2.2-50V	AB.....
C	137	87-010-403-080	0E	CAP, ELECT 3.3-50V	AB.....
C	135	87-010-405-080	0E	CAP, ELECT 10-50V	AB.....
C	132	87-010-405-080	0E	CAP, ELECT 10-50V	AB.....
C	131	87-010-545-080	0E	CAP, ELECT 0.22-50V	AB.....
C	149	87-010-317-080	0E	C-CAP,S 39P-50 CH	AB.....
C	143	87-010-403-080	0E	CAP, ELECT 3.3-50V	AB.....
C	152	87-010-068-080	0E	CAP, ELECT 0.22-50	AB.....
C	151	87-010-178-080	0E	CHIP CAP 1000P	AB.....
C	154	87-010-321-080	0E	CHIP CAPACITOR,82P(J)	.B.....
C	150	87-010-493-080		CAP,E 0.47-50 GAS	A.....
C	157	87-015-695-080	0E	CAP,E 1-50 7L	AB.....
C	164	87-010-198-080	0E	CAP, CHIP 0.022	AB.....
C	162	87-018-214-080	0E	CAP TC U 0.1-50F	AB.....
C	186	87-010-151-080	0E	C-CAP,S 7P-50 CH	AB.....
C	183	87-010-553-080	0E	CAP,E 47-16	AB.....
C	180	87-012-157-080	0E	C-CAP,S 330P-50 CH	AB.....
C	184	87-018-131-080	0E	CAP, CER 1000P-50V	AB.....
C	185	87-018-134-080	0E	CAPACITOR,TC-U 0.01-16	AB.....
C	201	87-010-112-080	0E	CAP, ELECT 100-16V	AB.....
C	205	87-010-263-080	0E	CAP, ELECT 100-10V	AB.....
C	204	87-010-371-080	0E	CAP, ELECT 470-6.3V	AB.....
C	321	87-010-312-080	0E	C-CAP,S 15P-50 CH	.B.....
C	329	87-010-315-080	0E	C-CAP,S 27P-50 CH	AB.....
C	327	87-010-318-080	0E	C-CAP,S 47P-50 CH	AB.....
C	331	87-010-182-080	0E	C-CAP,S 2200P-50 B	.B.....
C	338	87-012-145-080	0E	CAP, CHIP S 270P CH	AB.....
C	335	87-012-154-080	0E	C-CAP,S 150P-50 CH	AB.....
C	342	87-010-198-080	0E	CAP, CHIP 0.022	AB.....
C	341	87-010-405-080	0E	CAP, ELECT 10-50V	AB.....
C	356	87-010-197-080	0E	CAP, CHIP 0.01 DM	AB.....
C	353	87-010-311-080	0E	CAP 12P	AB.....
C	351	87-010-314-080	0E	C-CAP,S 22P-50V	AB.....
C	355	87-010-316-080	0E	C-CAP,S 33P-50 CH	AB.....
C	357	87-010-320-080	0E	CHIP CAP 68P	AB.....
C	354	87-010-320-080	0E	CHIP CAP 68P	AB.....
C	368	87-010-197-080	0E	CAP, CHIP 0.01 DM	AB.....
C	369	87-010-197-080	0E	CAP, CHIP 0.01 DM	AB.....
C	367	87-010-322-080	0E	C-CAP,S 100P-50 CH	AB.....
C	362	87-012-157-080	0E	C-CAP,S 330P-50 CH	AB.....
C	365	87-012-157-080	0E	C-CAP,S 330P-50 CH	AB.....
C	370	87-010-197-080	0E	CAP, CHIP 0.01 DM	AB.....
C	371	87-015-677-080	0E	CAP,E 100-6.3 7L	AB.....
C	451	87-010-112-080	0E	CAP, ELECT 100-16V	AB.....
C	459	87-010-175-080	0E	CAP 560P	AB.....
C	453	87-010-180-080	0E	C-CER 1500P	AB.....
C	454	87-010-186-080	0E	CAP,CHIP 4700P	.B.....
C	452	87-010-197-080	0E	CAP, CHIP 0.01 DM	AB.....
C	458	87-010-264-080	0E	CAP,E 100-10 5L	AB.....
C	457	87-010-405-080	0E	CAP, ELECT 10-50V	AB.....
C	455	87-010-415-080	0E	CAP ELE SRE 10-50V	AB.....
C	462	87-010-244-080	0E	CAP ELECT 16-22	AB.....
C	460	87-010-412-080	0E	CAP,E 10-25 5L	AB.....
C	461	87-010-805-080	0E	CAP, S 1-16	AB.....
C	461	87-016-462-080		C-CAP,S 1-16 F	A.....
C	605	87-010-154-080	0E	CAP CHIP 10P	.B.....
C	606	87-010-154-080	0E	CAP CHIP 10P	.B.....
C	613	87-010-184-080	0E	CHIP CAPACITOR 3300P(K)	AB.....
C	617	87-010-185-080	0E	C-CAP,S 3900P-50 B	.B.....
C	614	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	AB.....
C	615	87-010-375-080	0E	CAP,E 330-10 SME	AB.....
C	616	87-015-681-080	0E	CAP,E 10-16 7L	AB.....
C	618	87-015-681-080	0E	CAP,E 10-16 7L	AB.....
C	612	87-015-695-080	0E	CAP,E 1-50 7L	AB.....
C	628	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	AB.....
C	620	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	AB.....
C	623	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	AB.....
C	629	87-010-260-080	0E	CAP, ELECT 47-25V	AB.....

ELECTRICAL PARTS LIST-5/6

C	632	87-010-197-080	0E	CAP, CHIP 0.01 DM	AB.....
C	633	87-010-197-080	0E	CAP, CHIP 0.01 DM	AB.....
C	635	87-010-197-080	0E	CAP, CHIP 0.01 DM	AB.....
C	630	87-010-197-080	0E	CAP, CHIP 0.01 DM	AB.....
C	637	87-010-197-080	0E	CAP, CHIP 0.01 DM	AB.....
C	631	87-015-680-080	0E	CAP,E 47-10 7L	AB.....
C	636	87-015-684-080	0E	CAP,E 47-16 7L	AB.....
C	634	87-015-684-080	0E	CAP,E 47-16 7L	AB.....
C	699	87-010-184-080	0E	CHIP CAPACITOR 3300P(K)	AB.....
C	702	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	AB.....
C	703	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	AB.....
CN	301	87-A60-634-010	0E	CONN,4P V FEH-BT-V	AB.....
CN	603	81-557-779-010	0E	CONN,2P IL-S	.B.....
CN	604	87-099-197-010	0E	CONN, 9P 6216 V	AB.....
CN	602	87-A60-260-010	0E	CONN,6P V TKC-G06P	AB.....
CN	605	87-A60-582-010	0E	CONN,5P V BGE TKX-P05P-X1	AB.....
CN	601	87-A60-583-010	1B	CONN,10P V TKC-G10P	AB.....
CN	701	87-099-202-010	0E	CONN,9P 6216 H	AB.....
CNA	402	88-JP9-624-010		CONN ASSY,5P AC	A.....
CNA	402	88-JP9-624-110	1B	CONN ASSY,5P AC	.B.....
CNA	602	88-JP6-623-010	1A	CONN ASSY,7P MOTOR	AB.....
D	1	87-070-173-010	1A	DIODE,S1WBA60	AB.....
D	7	87-A40-184-090	1A	DIODE,RK34(F)	AB.....
D	5	87-A40-291-080	0E	DIODE,1N4148 (CPT)	AB.....
D	2	87-A40-368-080	0E	DIODE,EG01C	AB.....
D	6	87-A40-369-090	1A	DIODE,RN3Z	AB.....
D	3	87-A40-480-080	1A	ZENER,P6KE150A-G23	A.....
D	3	87-A40-559-080	1B	ZENER,P6KE110A-G23	.B.....
D	3	87-XM1-602-080		ZENER,P6KE91-G23
D	321	87-A40-291-080	0E	DIODE,1N4148 (CPT)	AB.....
D	322	87-A40-291-080	0E	DIODE,1N4148 (CPT)	AB.....
D	402	87-A40-466-080	0E	ZENER,MTZJ2.7A	AB.....
D	609	87-070-274-080		DIODE,1N4003 SEM	A.....
D	608	87-070-274-080		DIODE,1N4003 SEM	A.....
D	607	87-070-274-080		DIODE,1N4003 SEM	A.....
D	604	87-070-418-010	0E	LED,LN66A	AB.....
D	602	87-A40-291-080	0E	DIODE,1N4148 (CPT)	AB.....
D	603	87-A40-291-080	0E	DIODE,1N4148 (CPT)	AB.....
D	605	87-A40-344-080	0E	ZENER,MTZJ6.2C	AB.....
D	609	87-A40-553-080	0E	DIODE,1N4003 LES	.B.....
D	608	87-A40-553-080	0E	DIODE,1N4003 LES	.B.....
D	607	87-A40-553-080	0E	DIODE,1N4003 LES	.B.....
D	706	87-017-350-080	0E	LED,SEL1550CM	AB.....
D	708	87-017-350-080	0E	LED,SEL1550CM	AB.....
D	705	87-017-350-080	0E	LED,SEL1550CM	AB.....
D	707	87-017-350-080	0E	LED,SEL1550CM	AB.....
D	709	87-017-350-080	0E	LED,SEL1550CM	AB.....
D	703	87-017-733-080	0E	LED,SEL1250SM	AB.....
D	710	87-017-350-080	0E	LED,SEL1550CM	AB.....
D	711	87-017-350-080	0E	LED,SEL1550CM	AB.....
D	712	87-017-350-080	0E	LED,SEL1550CM	AB.....
F	1	87-035-401-010	0E	FUSE 1.6A-250V UL	.B.....
F	1	87-035-413-010		FUSE T 1.6A 250V UL
F	1	87-035-454-010	0E	FUSE,1.6A 250V T W/C	A.....
FB	1	87-003-223-080	0E	FERRITE BEAD BL02RN2	.B.....
FC	2	87-A90-505-080	0E	FUSE CLAMP,TP00351-51	AB.....
FC	1	87-A90-505-080	0E	FUSE CLAMP,TP00351-51	AB.....
IC	2	87-A20-649-080	1A	IC,HA17431VP	AB.....
IC	1	88-JP6-616-010	1H	IC,TOP224Y	A.....
IC	1	88-JPH-616-010	1H	IC,TOP101Y	.B.....
IC	101	87-A20-216-110	2M	C-IC,HA118201CF	AB.....
IC	102	87-A20-463-040	1E	C-IC,MSM7476-76MS	AB.....
IC	201	87-070-427-080	1A	IC,KIA78L05BP	.B.....
IC	301	87-070-424-040	1C	IC,BA7180F	AB.....
IC	451	87-070-391-040	1A	IC,BA4558F	AB.....
IC	602	87-001-982-010	1B	IC,TA7291S	AB.....
IC	601	88-JP6-611-010	2M	C-IC,M37776M5A-166GP	AB.....
IC	702	87-070-083-010	1C	IC,GP1U281X	AB.....
IC	701	87-070-289-040	1B	IC,BU 2092F	AB.....
J	203	87-099-366-010	1A	JACK,2.5 LGK6501	.B.....
J	201	87-A60-240-010	1A	JACK,PIN 2P Y/B HTJ-033	AB.....
L	4	87-A50-180-080	0E	COIL,22UH K LHL10	AB.....
L	3	87-A50-180-080	0E	COIL,22UH K LHL10	AB.....
L	2	87-A50-180-080	0E	COIL,22UH K LHL10	AB.....
L	101	87-003-282-080	0E	COIL,12UH	AB.....
L	105	87-005-481-080	0E	COIL,47UH J FLR50	AB.....
L	109	87-005-481-080	0E	COIL,47UH J FLR50	AB.....
L	102	87-005-730-080	0E	COIL,10UH J SP02	AB.....
L	104	87-005-736-080	0E	COIL,33UH J SP02	AB.....
L	108	87-005-741-080	0E	COIL,82UH J SP02	AB.....
L	181	87-005-740-080	0E	COIL,68UH J SP02	AB.....
L	180	87-005-742-080	0E	COIL,100UH J SP02	AB.....
L	201	87-005-738-080	0E	COIL,47UH J SP02	AB.....
L	301	87-005-481-080	0E	COIL,47UH J FLR50	AB.....
L	326	87-005-729-080	0E	COIL,8.2UH J SP02	AB.....
L	324	87-005-731-080	0E	COIL,12UH J SP02	.B.....
L	322	87-005-741-080	0E	COIL,82UH J SP02	AB.....
L	358	87-005-481-080	0E	COIL,47UH J FLR50	AB.....
L	353	87-005-732-080	0E	COIL,15UH J SP02	AB.....
L	351	87-005-734-080	0E	COIL,22UH J SP02	AB.....
L	356	87-005-738-080	0E	COIL,47UH J SP02	AB.....
L	352	87-005-738-080	0E	COIL,47UH J SP02	AB.....

ELECTRICAL PARTS LIST-6/6

L	355	87-005-745-080	0E	COIL,180UH J SP02	AB.....
L	359	87-005-746-080	0E	COIL,220UH J SP02	AB.....
L	403	87-005-739-080	0E	COIL,56UH J SP02	AB.....
L	601	87-005-481-080	0E	COIL,47UH J FLR50	AB.....
L	602	87-005-481-080	0E	COIL,47UH J FLR50	AB.....
LF	1	87-A90-869-010	1B	FLTR,LINE LF2020-333	AB.....
PS	1	87-A90-717-010	1A	P-COUPLER,PC123FY2	AB.....
PS	602	87-A90-185-010		SNSR,SG-239S	A.....
PS	601	87-A90-185-010		SNSR,SG-239S	A.....
PS	601	87-A90-834-010	1B	SNSR,SG-258S	AB.....
PS	602	87-A90-834-010	1B	SNSR,SG-258S	AB.....
PT	1	88-JP6-630-010	1E	PT,KER SWT	AB.....
Q	4	87-A30-062-080	0E	C-TR,KRC104S	AB.....
Q	2	87-A30-062-080	0E	C-TR,KRC104S	AB.....
Q	3	89-109-340-480	0E	TR,2SA934Q	AB.....
Q	1	89-109-521-080	0E	TR,2SA952 (0.6W)	AB.....
Q	114	87-A30-062-080	0E	C-TR,KRC104S	AB.....
Q	115	87-A30-063-080	0E	C-TR,KRA104S	AB.....
Q	181	87-A30-061-080	0E	C-TR,KTA1504GR	AB.....
Q	202	87-A30-061-080	0E	C-TR,KTA1504GR	AB.....
Q	302	87-A30-061-080	0E	C-TR,KTA1504GR	AB.....
Q	332	87-A30-062-080	0E	C-TR,KRC104S	AB.....
Q	356	87-A30-062-080	0E	C-TR,KRC104S	AB.....
Q	352	87-A30-062-080	0E	C-TR,KRC104S	AB.....
Q	364	87-A30-060-080	0E	C-TR,KTC3875GR	AB.....
Q	363	87-A30-062-080	0E	C-TR,KRC104S	AB.....
Q	431	87-A30-060-080	0E	C-TR,KTC3875GR	AB.....
Q	432	87-A30-060-080	0E	C-TR,KTC3875GR	AB.....
Q	452	87-A30-062-080	0E	C-TR,KRC104S	AB.....
Q	453	87-A30-062-080	0E	C-TR,KRC104S	AB.....
Q	451	87-A30-063-080	0E	C-TR,KRA104S	AB.....
Q	605	87-A30-060-080	0E	C-TR,KTC3875GR	AB.....
Q	601	87-A30-060-080	0E	C-TR,KTC3875GR	AB.....
Q	608	87-A30-060-080	0E	C-TR,KTC3875GR	AB.....
Q	604	87-A30-060-080	0E	C-TR,KTC3875GR	AB.....
Q	603	87-A30-060-080	0E	C-TR,KTC3875GR	AB.....
Q	602	87-A30-061-080	0E	C-TR,KTA1504GR	AB.....
Q	606	87-A30-141-010	0E	P-TR,PN268NC-R	AB.....
Q	607	87-A30-141-010	0E	P-TR,PN268NC-R	AB.....
R	9	87-025-408-080		RES,M/F 120K-1/6W F	A.....
R	8	87-A00-414-090	0E	RES,M/F 8.2-1W J RNS1X	AB.....
R	11	87-022-629-080	0E	RES,M/F 11K-1/6WF	AB.....
R	10	87-025-381-080		RES,M/F 18K-1/6W F	A.....
R	10	87-025-425-080	0E	RES,M/F 12K-1/6W F	.B.....
R	12	87-A00-363-090	0E	RES,M/F 68K-2W J RSS2X	AB.....
RF	201	83-JPC-616-010	2P	MOD,RF VJ1108 TH	A.....
S	601	87-036-267-080		SW,TACT SKHVBK	A.....
S	601	87-A90-873-080	0E	SW,TACT SKQNAJ	.B.....
S	703	87-A90-164-080	0E	SW,TACT SKQAB(N)	AB.....
S	705	87-A90-164-080	0E	SW,TACT SKQAB(N)	AB.....
S	706	87-A90-164-080	0E	SW,TACT SKQAB(N)	AB.....
S	701	87-A90-164-080	0E	SW,TACT SKQAB(N)	AB.....
S	702	87-A90-164-080	0E	SW,TACT SKQAB(N)	AB.....
S	704	87-A90-164-080	0E	SW,TACT SKQAB(N)	AB.....
S	707	87-A90-164-080	0E	SW,TACT SKQAB(N)	AB.....
SFR	601	87-024-177-080	0E	SEMI-FIXED RESISTER, 220K	AB.....
TM	1	87-A60-317-010	0E	TERMINAL, 1P MSC	AB.....
TM	2	87-A60-317-010	0E	TERMINAL, 1P MSC	AB.....
X	102	86-JPS-614-080		VIB,XTAL 3.58MHZ	AB.....

MECHANICAL PARTS LIST-1/1

NOTE: The characters in the suffix column indicate the part usage.


ST	REF.NO	PARTS NO.	NO.	DESCRIPTION	SUFFIX
.....			OO		B
			KANRI		
			NO.		
		82-NE8-032-010	1A	BADGE,AIWA 27.5	.B
		84-JP9-202-010	0E	SPR-T,DOOR	.B
		85-JPC-210-010		SPR-T,DOOR B	
		88-JP6-006-010	1A	WINDOW,DSPLY 1	.B
		88-JP6-007-010	1A	KEY,POWER	.B
		88-JP6-009-010	0E	CAP, RING	.B
		88-JPK-001-010		CABI,FR	
		88-JPK-001-110		CABI,FR	.B
		88-JPK-005-010		DOOR,CASS 3	
		88-JPK-005-210		DOOR,CASS 3	.B
		88-JPK-008-010	1B	KEY,CONT 3	.B
		88-JPK-010-010		PLATE,WIN 3	.B
		81-JUK-045-010	0E	FELT,FOOT 8-8	.B
		88-JP6-003-010	1F	CABI,STEEL	.B
		88-JPK-004-010		PANEL,RE 3	.B
		81-JUK-045-010	0E	FELT,FOOT 8-8	
		82-NE8-032-010	1A	BADGE,AIWA 27.5	
		84-JP9-202-010	0E	SPR-T,DOOR	
		85-JPC-207-010	0E	HLDR,TS	
		85-JPK-607-010	2A	SENSOR,DEW S10R4	
		87-067-579-010	0E	TAPPING SCREW, BVT2+3-8	A
		87-067-688-010	0E	BVTT+3-6	A
		87-067-703-010	0E	TAPPING SCREW, BVT2+3-10	A
		87-067-761-010	0E	TAPPING SCREW, BVT2+3-10	A
		87-078-070-010	0E	BVIT3B+4-12	A
		88-JP6-003-010	1F	CABI,STEEL	A
		88-JP6-006-010	1A	WINDOW,DSPLY 1	
		88-JP6-007-010	1A	KEY,POWER	A
		88-JP6-009-010	0E	CAP, RING	
		88-JPK-001-110		CABI,FR	
		88-JPK-002-110	1D	CABI,MAIN	
		88-JPK-004-010		PANEL,RE 3	
		88-JPK-005-210		DOOR,CASS 3	
		88-JPK-008-010	1B	KEY,CONT 3	
		88-JPK-010-010		PLATE,WIN 3	
		88-JPK-014-010	0E	PANEL,RE 7	A
		85-JPC-207-010	0E	HLDR,TS	.B
CS 601		85-JPK-607-010	2A	SENSOR,DEW S10R4	.B
		87-067-579-010	0E	TAPPING SCREW, BVT2+3-8	.B
		87-067-688-010	0E	BVTT+3-6	.B
		87-067-703-010	0E	TAPPING SCREW, BVT2+3-10	.B
		87-067-761-010	0E	TAPPING SCREW, BVT2+3-10	.B
		87-078-070-010	0E	BVIT3B+4-12	.B
		82-NE8-032-010	1A	BADGE,AIWA 27.5	A
		84-JP9-202-010	0E	SPR-T,DOOR	
		84-LB3-024-010		PLATE FOOT	A
		84-LB3-024-110	0E	PLATE FOOT KE	
		85-JPC-210-010		SPR-T,DOOR B	A
		88-JP6-006-010	1A	WINDOW,DSPLY 1	A
		88-JP6-009-010	0E	CAP, RING	A
		88-JP9-008-010	1B	KEY,CONT 2	A
		88-JP9-010-010	1A	PLATE,WIN 2	A
		88-JPH-005-010		DOOR,CASS 5	A
		88-JPH-005-210	1A	DOOR,CASS 5	
		88-JPK-011-010		CABI,FR	A
		88-JPK-011-110	1D	CABI,FR	=
		81-JUK-045-010	0E	FELT,FOOT 8-8	A
		85-JPC-207-010	0E	HLDR,TS	A
		85-JPC-205-110	0E	HLDR,LED SENDOR	
		85-JPC-206-110	0E	HLDR,T/E SENSOR	
		87-067-579-010	0E	TAPPING SCREW, BVT2+3-8	
		87-A80-091-010	1C	AC CORD ASSY,D BLK	
		88-909-121-110	0E	FF-CABLE,9P 12CM	
		85-JPC-205-110	0E	HLDR,LED SENDOR	AB
		85-JPC-206-110	0E	HLDR,T/E SENSOR	AB
		87-067-579-010	0E	TAPPING SCREW, BVT2+3-8	AB
		87-A80-091-010	1C	AC CORD ASSY,D BLK	.B
		87-A80-099-010	1C	AC CORD ASSY,NH BLK	A

ACCESSORIES / PACKAGE LIST-1/1


NOTE: The characters in the suffix column indicate the part usage.

ST	OO.....	B.....
	KANRI	
REF.NO	PARTS NO.	NO. DESCRIPTION SUFFIX
	88-JPK-901-010	IB,D-M .B.....
	88-JPK-901-010	IB,D-M
	87-034-797-010 1E	CORD,PIN 2P .B.....
	88-JPK-670-010	RC UNIT,RC-8VP05 .B.....
	83-JUP-662-010	RF CODE,NT RH A.....
	87-034-797-010 1E	CORD,PIN 2P
	87-B30-105-010 1C	CORD,RF NTSC/UJ0501
	88-JP9-670-010 2A	RC UNIT,RC-8VP03 A.....
	88-JPK-670-010	RC UNIT,RC-8VP05


SCHEMATIC DIAGRAM – 1 (VIDEO)

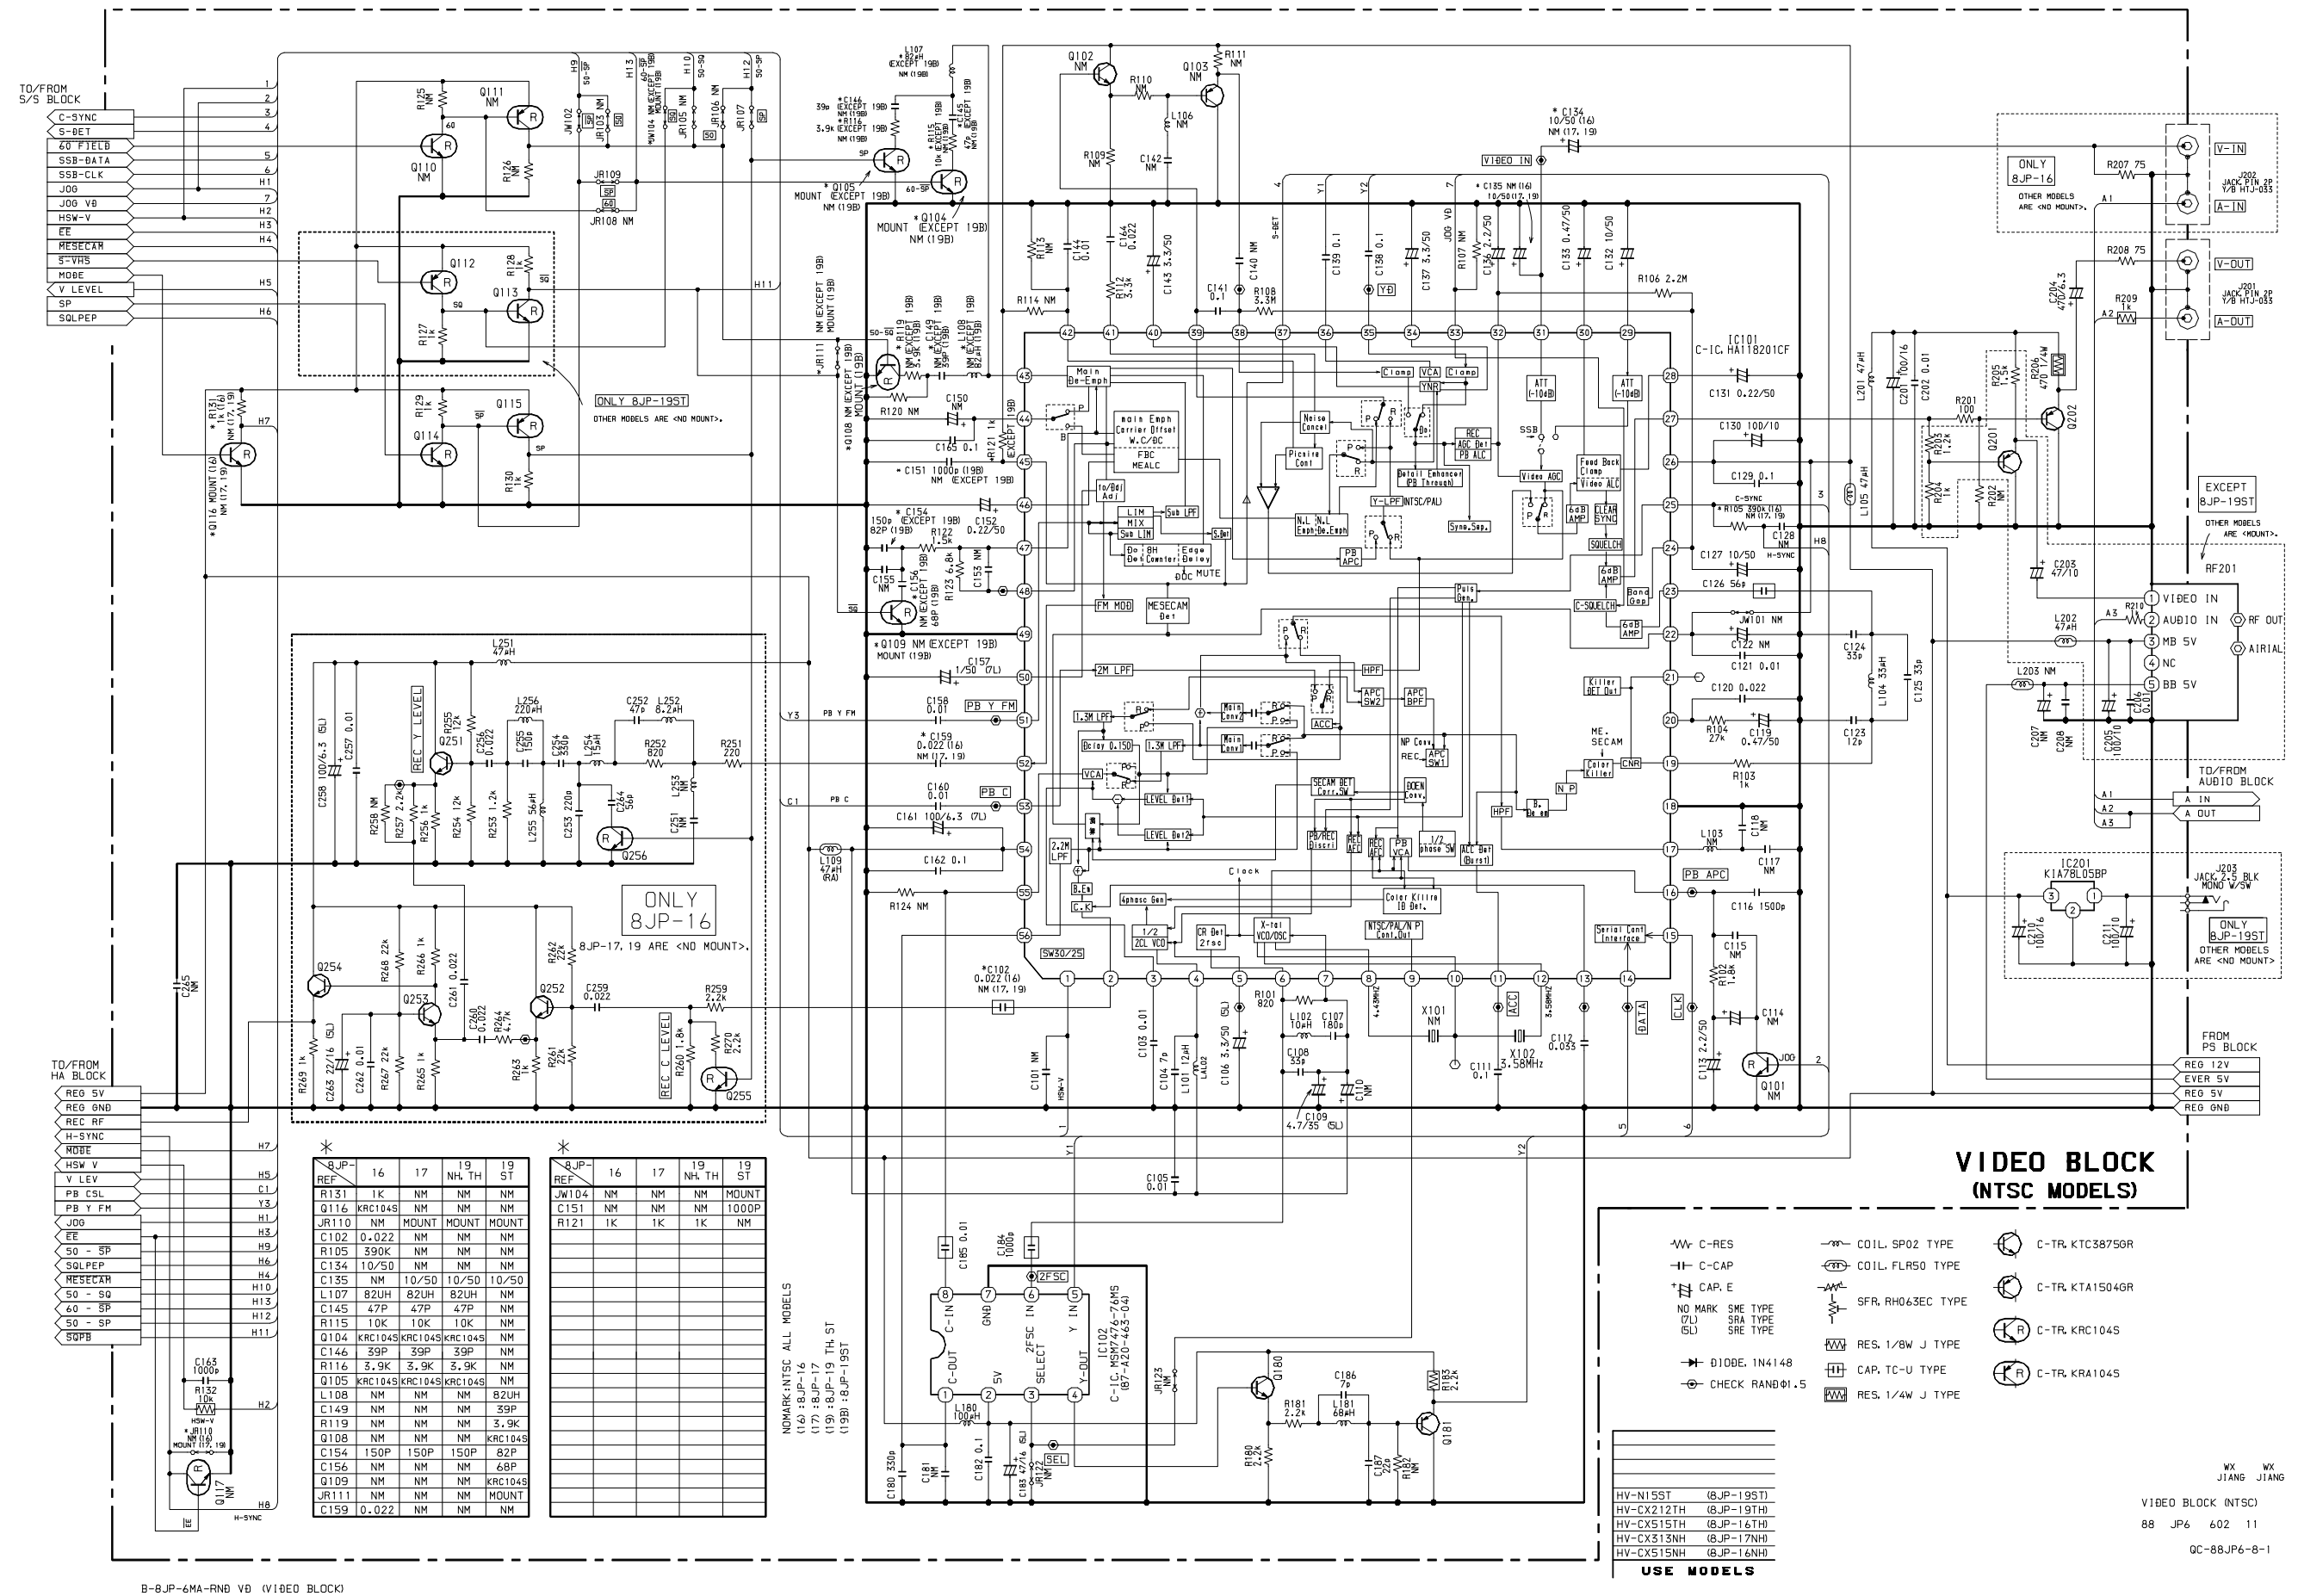

SCHEMATIC DIAGRAM – 2 (AUDIO)

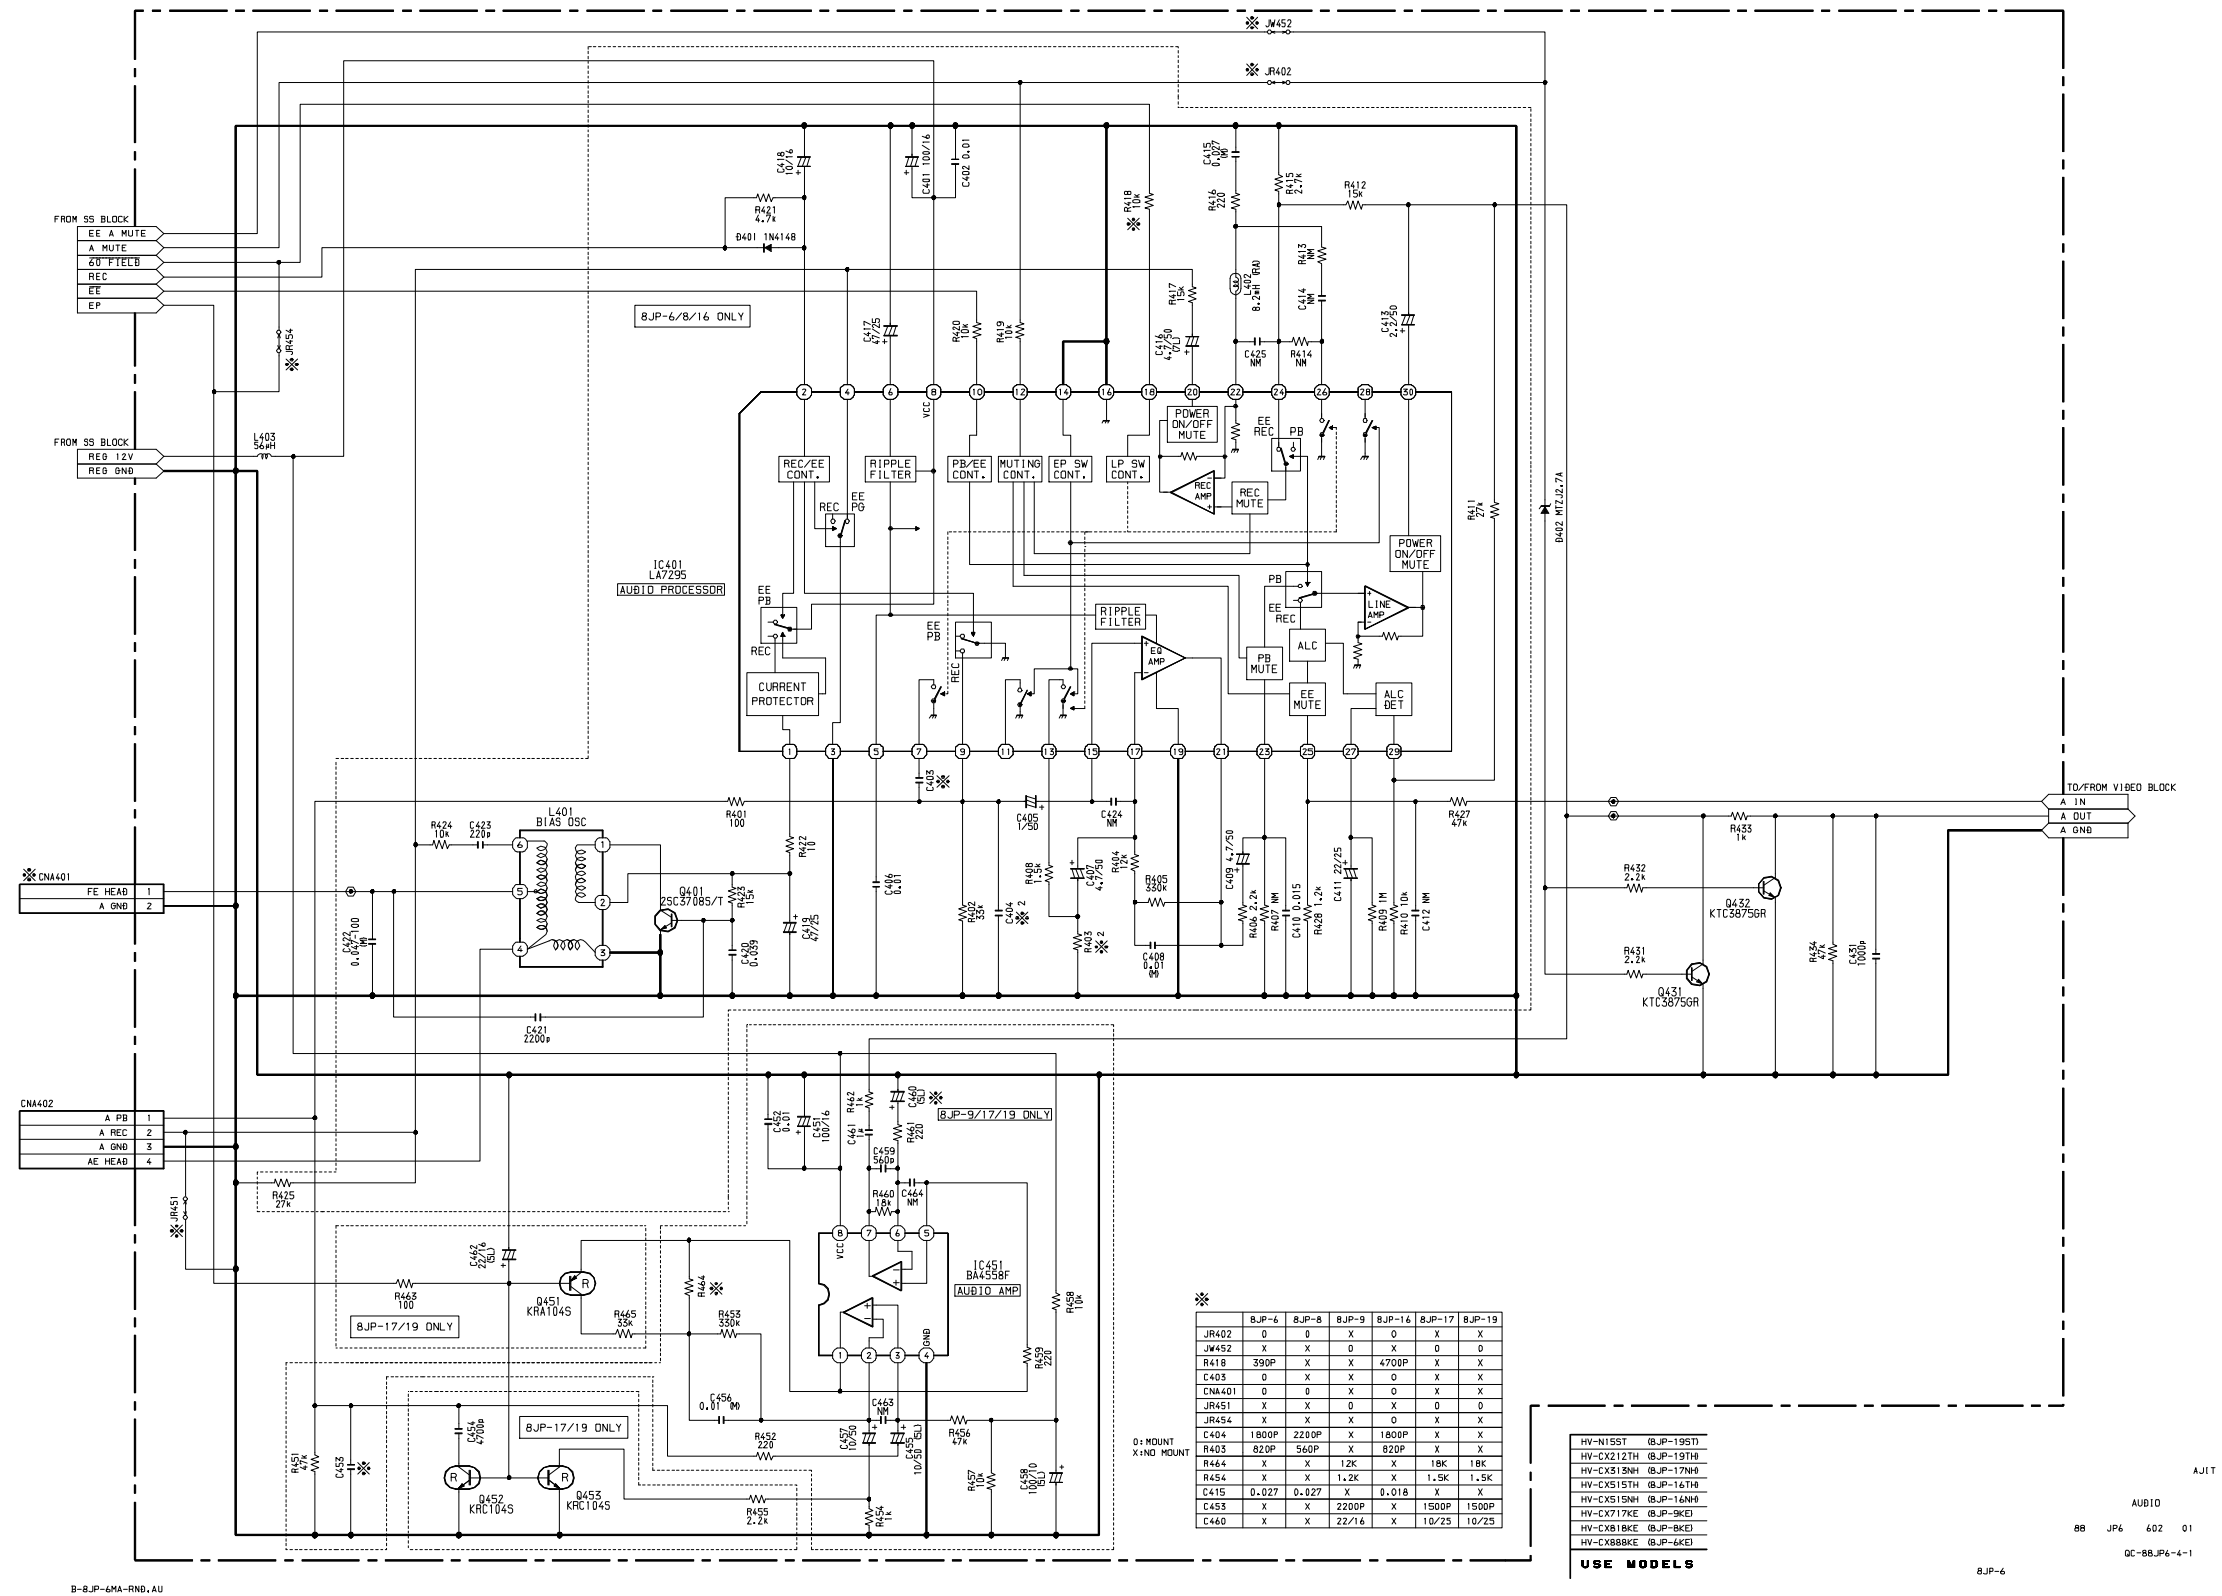

SCHEMATIC DIAGRAM – 3 (FRONT)

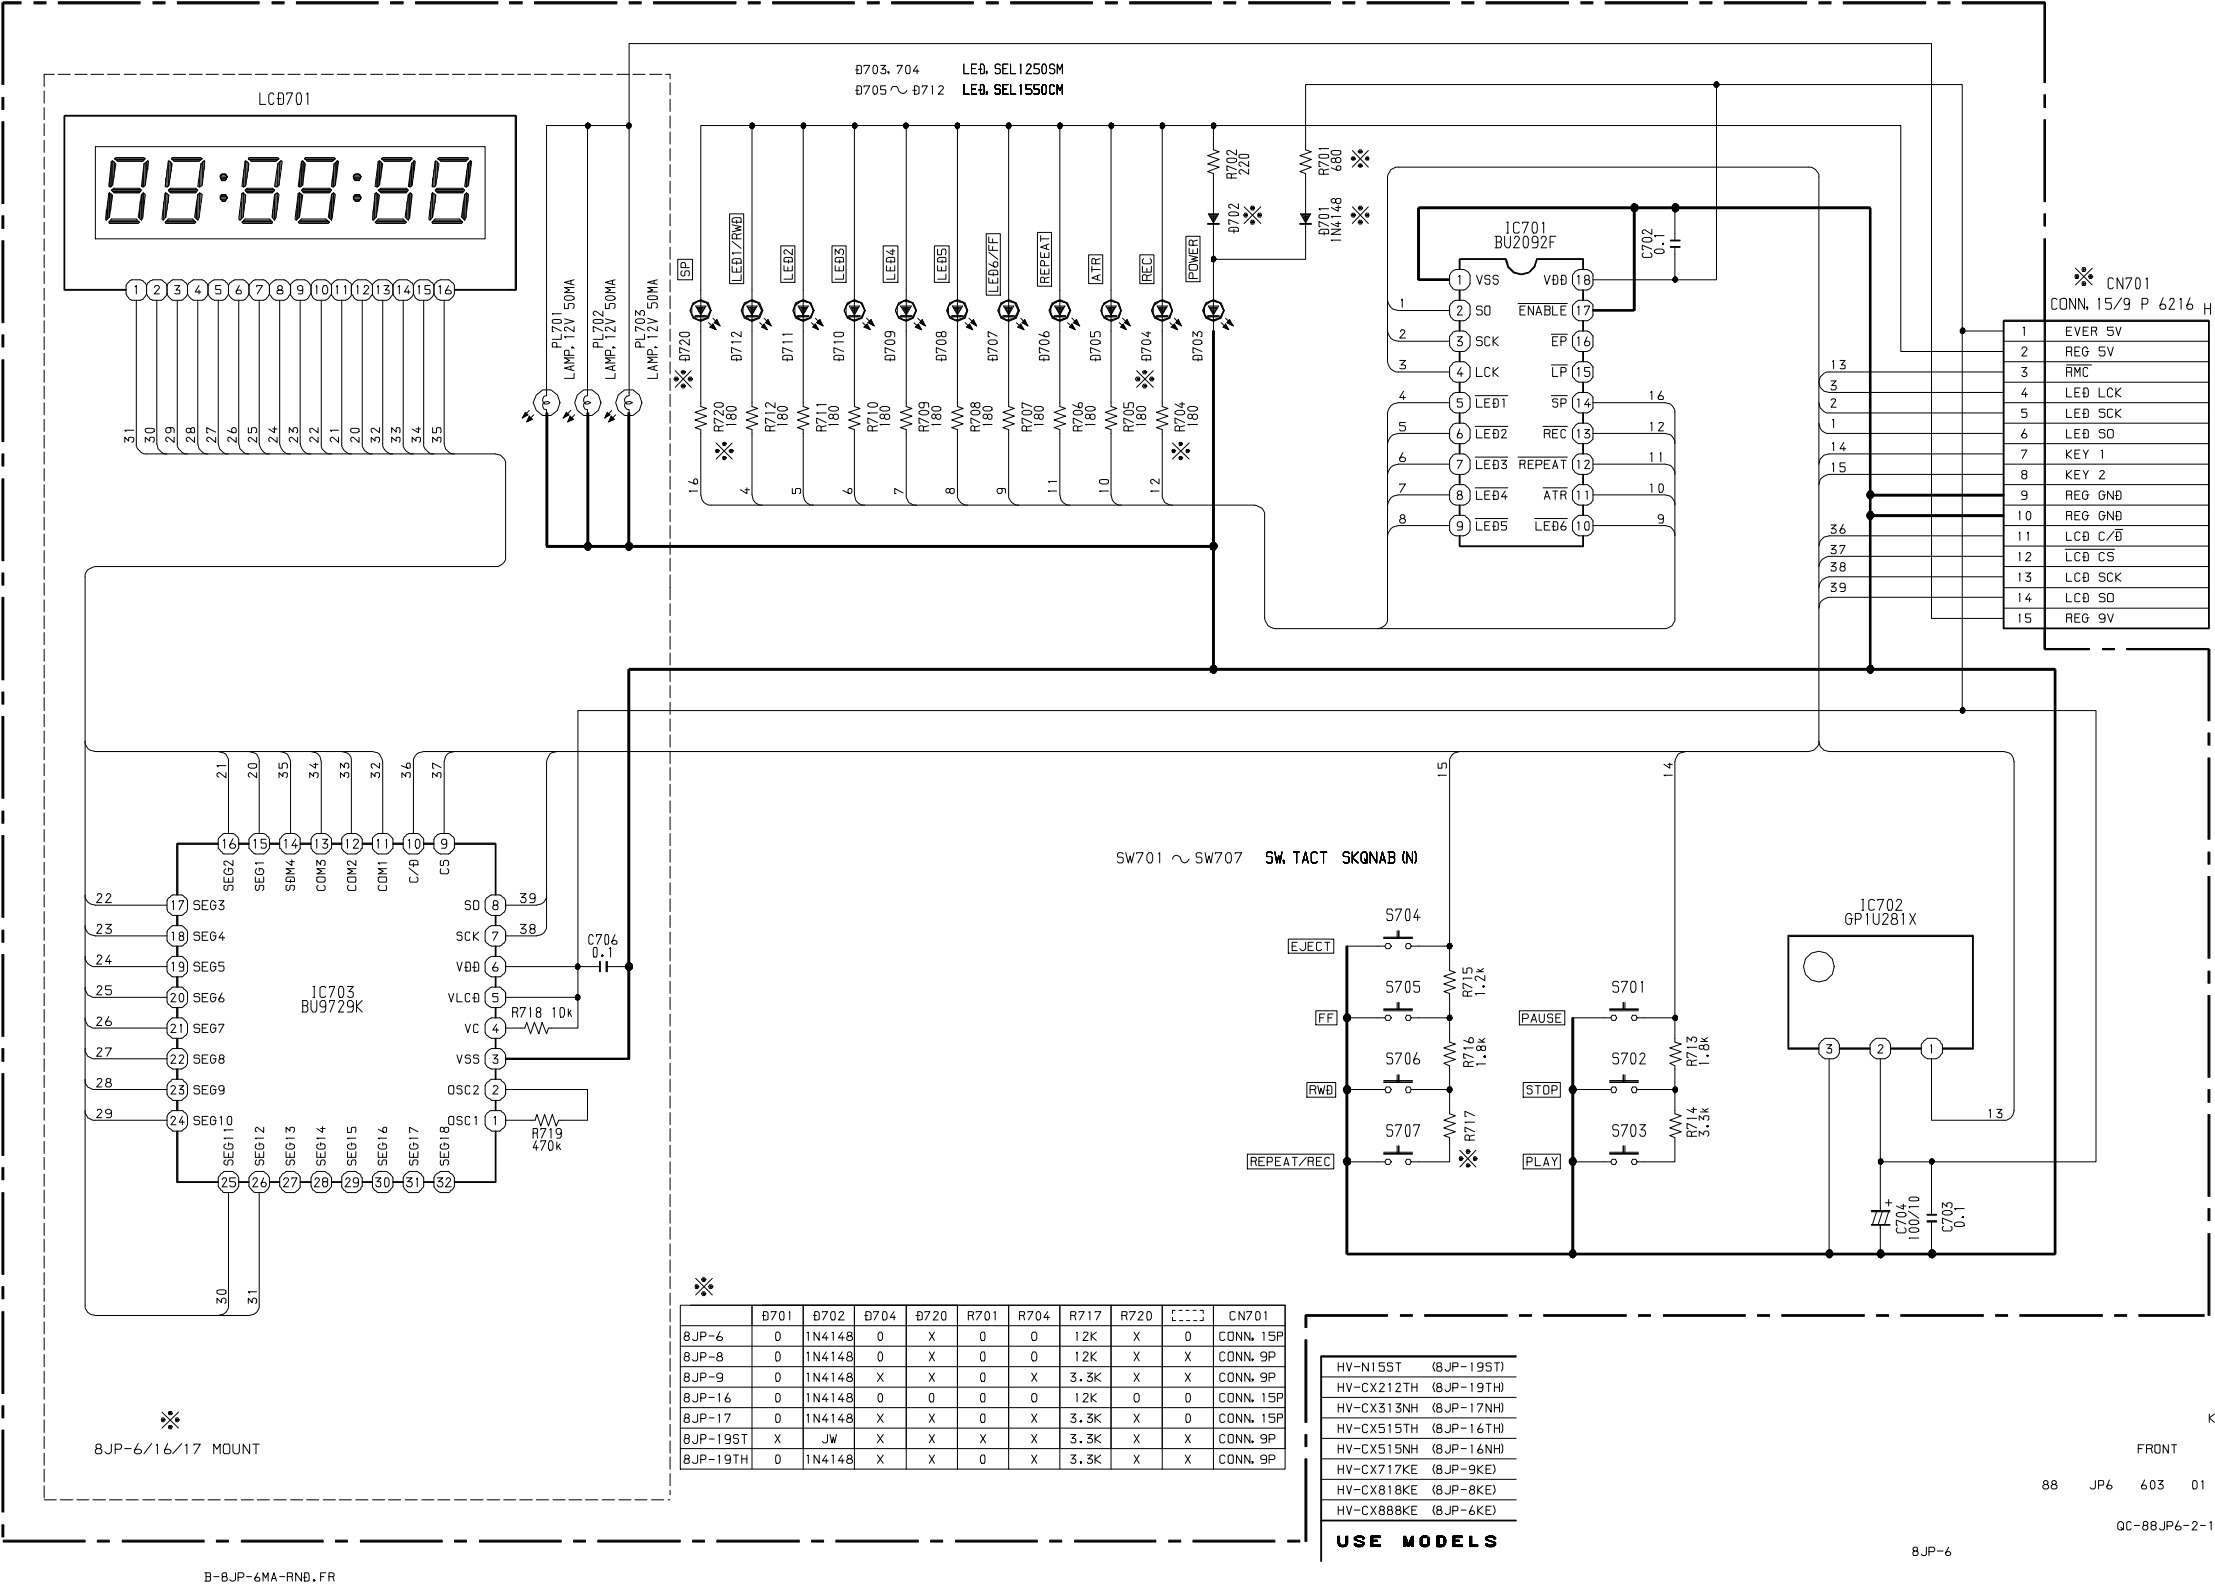

EK
KUAN



FRONT

88 JP6 603 01

QC-88JP6-2-1

8JP-6

SCHEMATIC DIAGRAM – 4 (HEAD AMP)

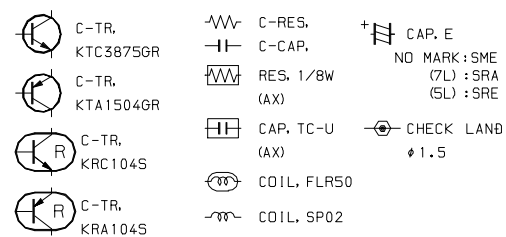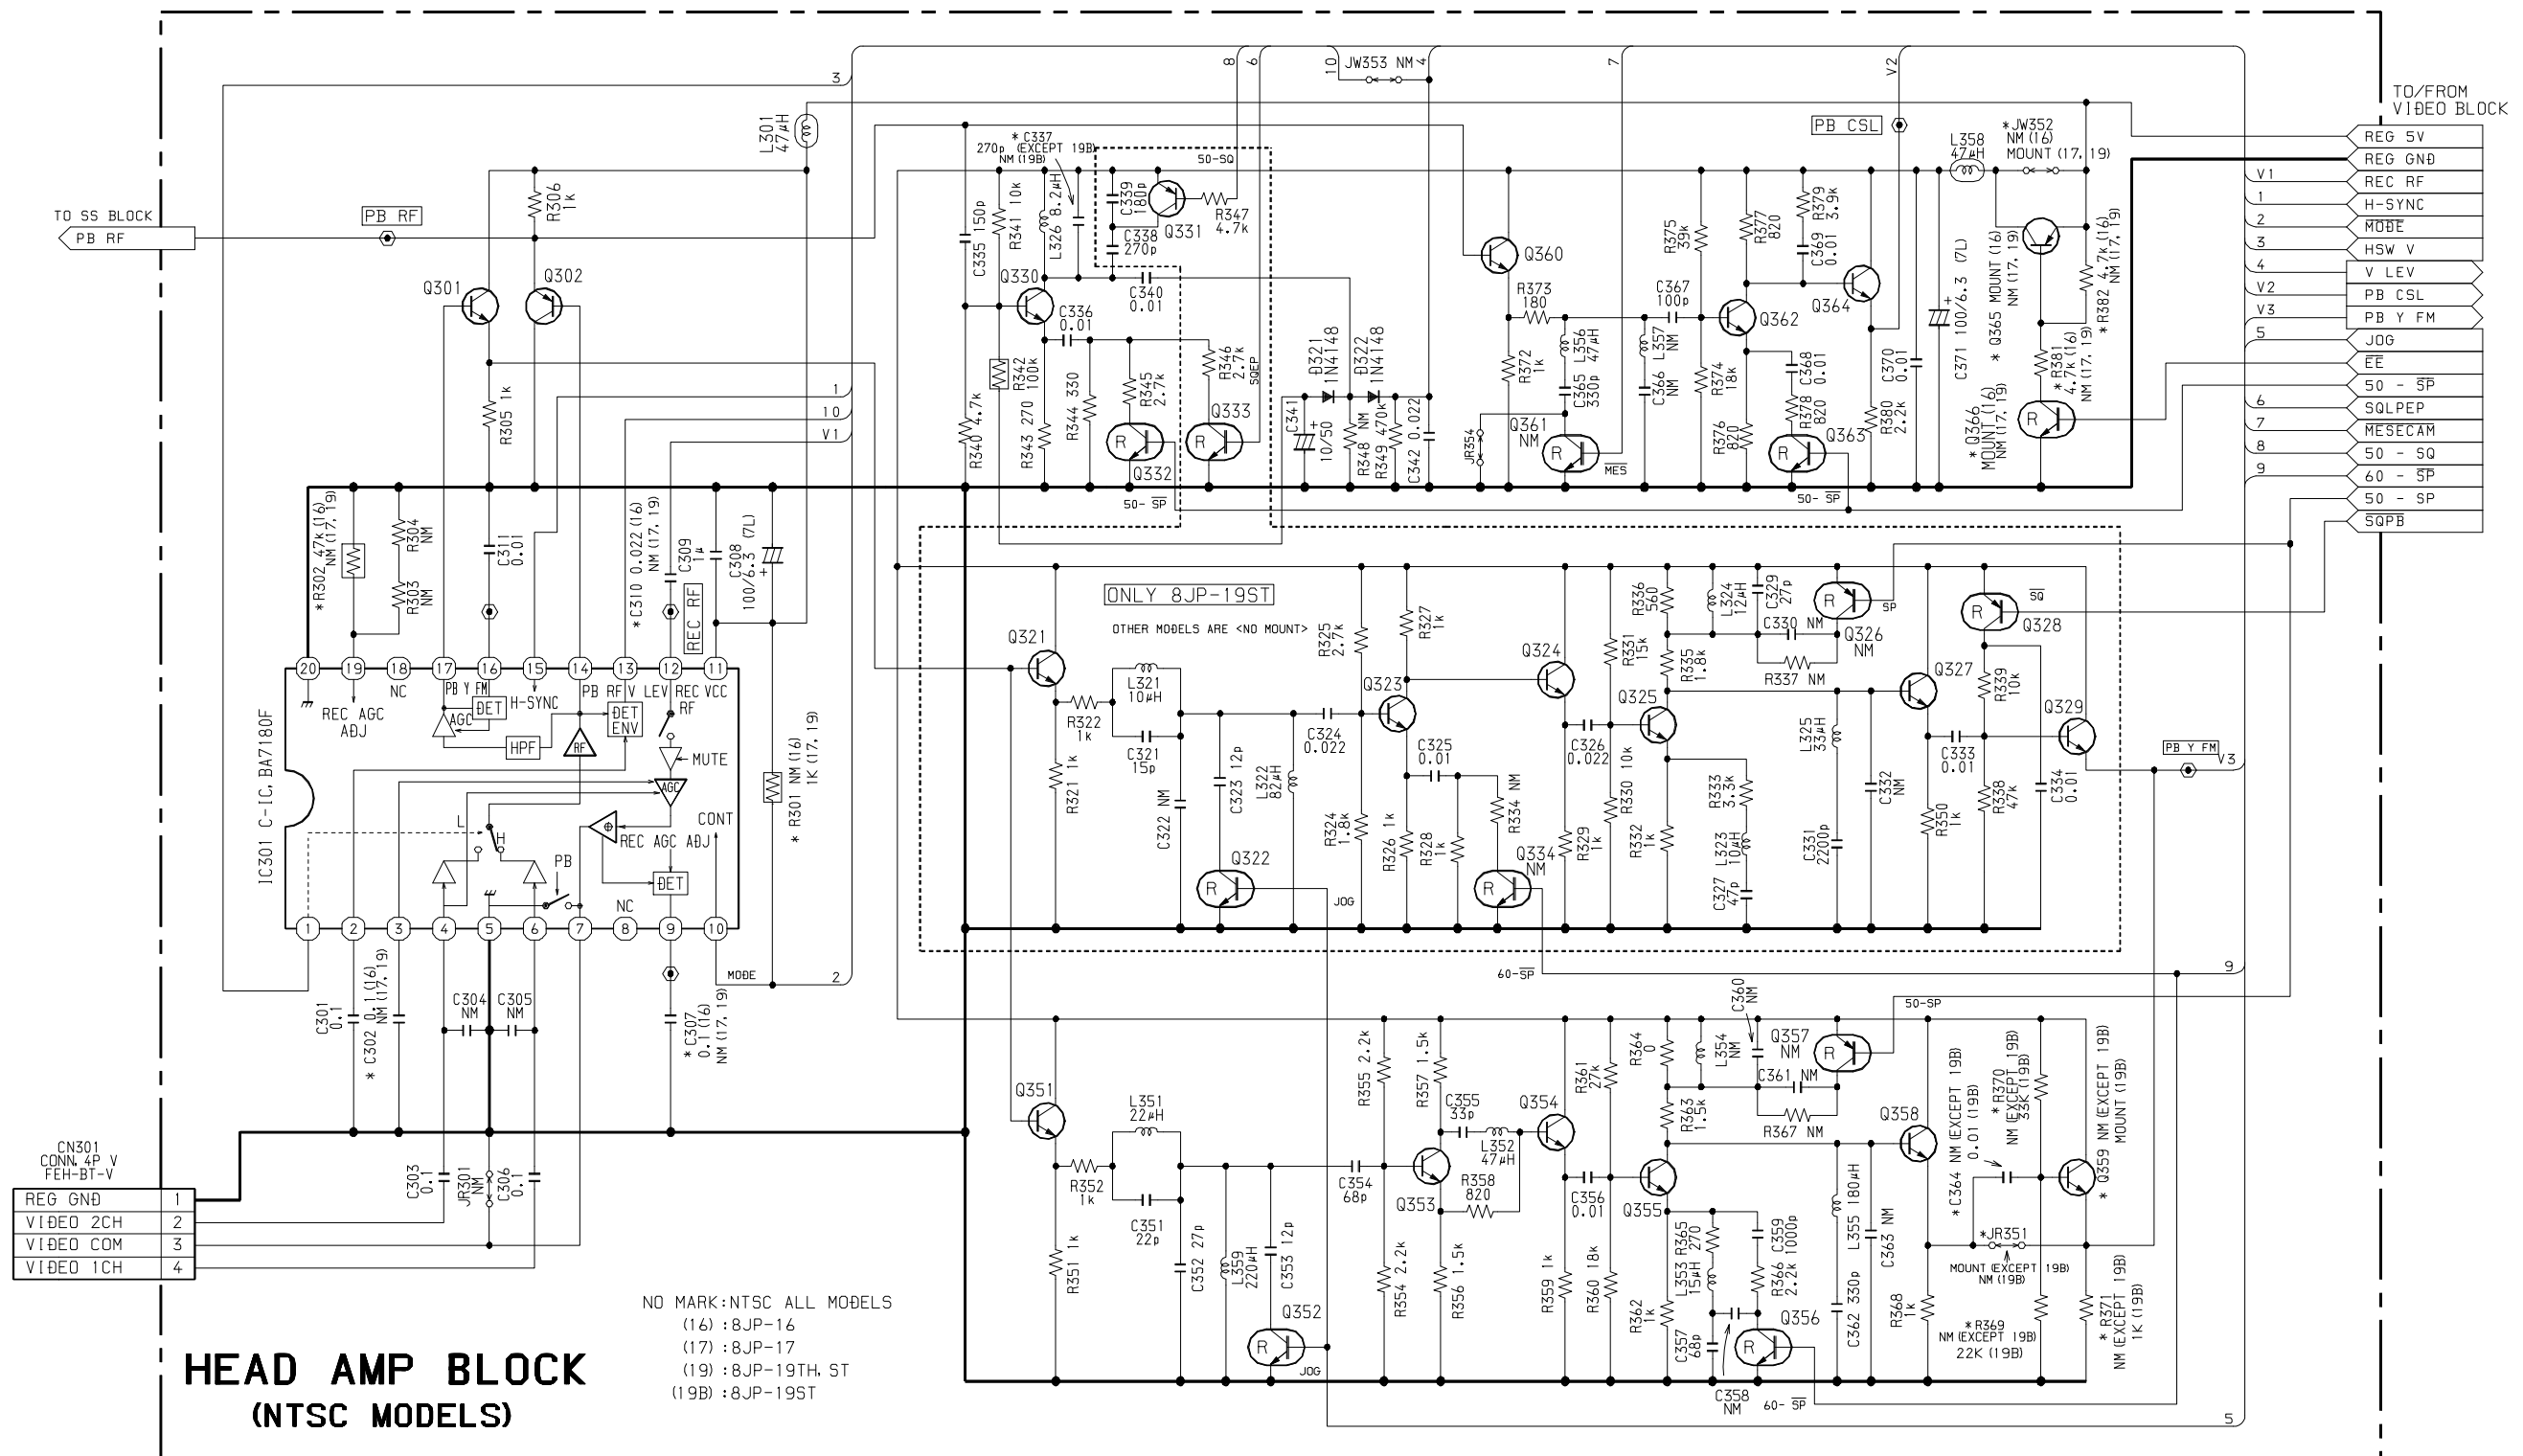

* \	8JP-16	8JP-17	8JP-19 NH ₂ TH	8JP-19 S ₁ TH		8JP-16	8JP-17	8JP-19 NH ₂ TH	8JP-19 S ₁ TH
C302	0.1	NM	NM	NM	R381	4.7K	NM	NM	NM
C307	0.1	NM	NM	NM	R382	4.7K	NM	NM	NM
R301	NM	1K (AX)	1K (AX)	1K (AX)	R369	NM	NM	NM	22K
C310	0.022	NM	NM	NM	R370	NM	NM	NM	33K
R302	39K	NM	NM	NM	R371	NM	NM	NM	1K
C337	270P	270P	270P	NM	C364	NM	NM	NM	0.01
JW352	NM	MOUNT	MOUNT	MOUNT	JR351	MOUNT	MOUNT	MOUNT	NM
Q365	MOUNT	NM	NM	NM	Q359	NM	NM	NM	MOUNT
Q366	MOUNT	NM	NM	NM					

HV-N15ST	(8JP-19ST)
HV-CX212TH	(8JP-19TH)
HV-CX515TH	(8JP-16TH)
HV-CX313NH	(8JP-17NH)
HV-CX515NH	(8JP-16NH)

USE MODELS


WX
JIANG

VIDEO HA BLOCK (NTSC)

88 JP6 602 11

QC-8JP6-7-1

SCHEMATIC DIAGRAM – 5 (SYSCON/SERVO)

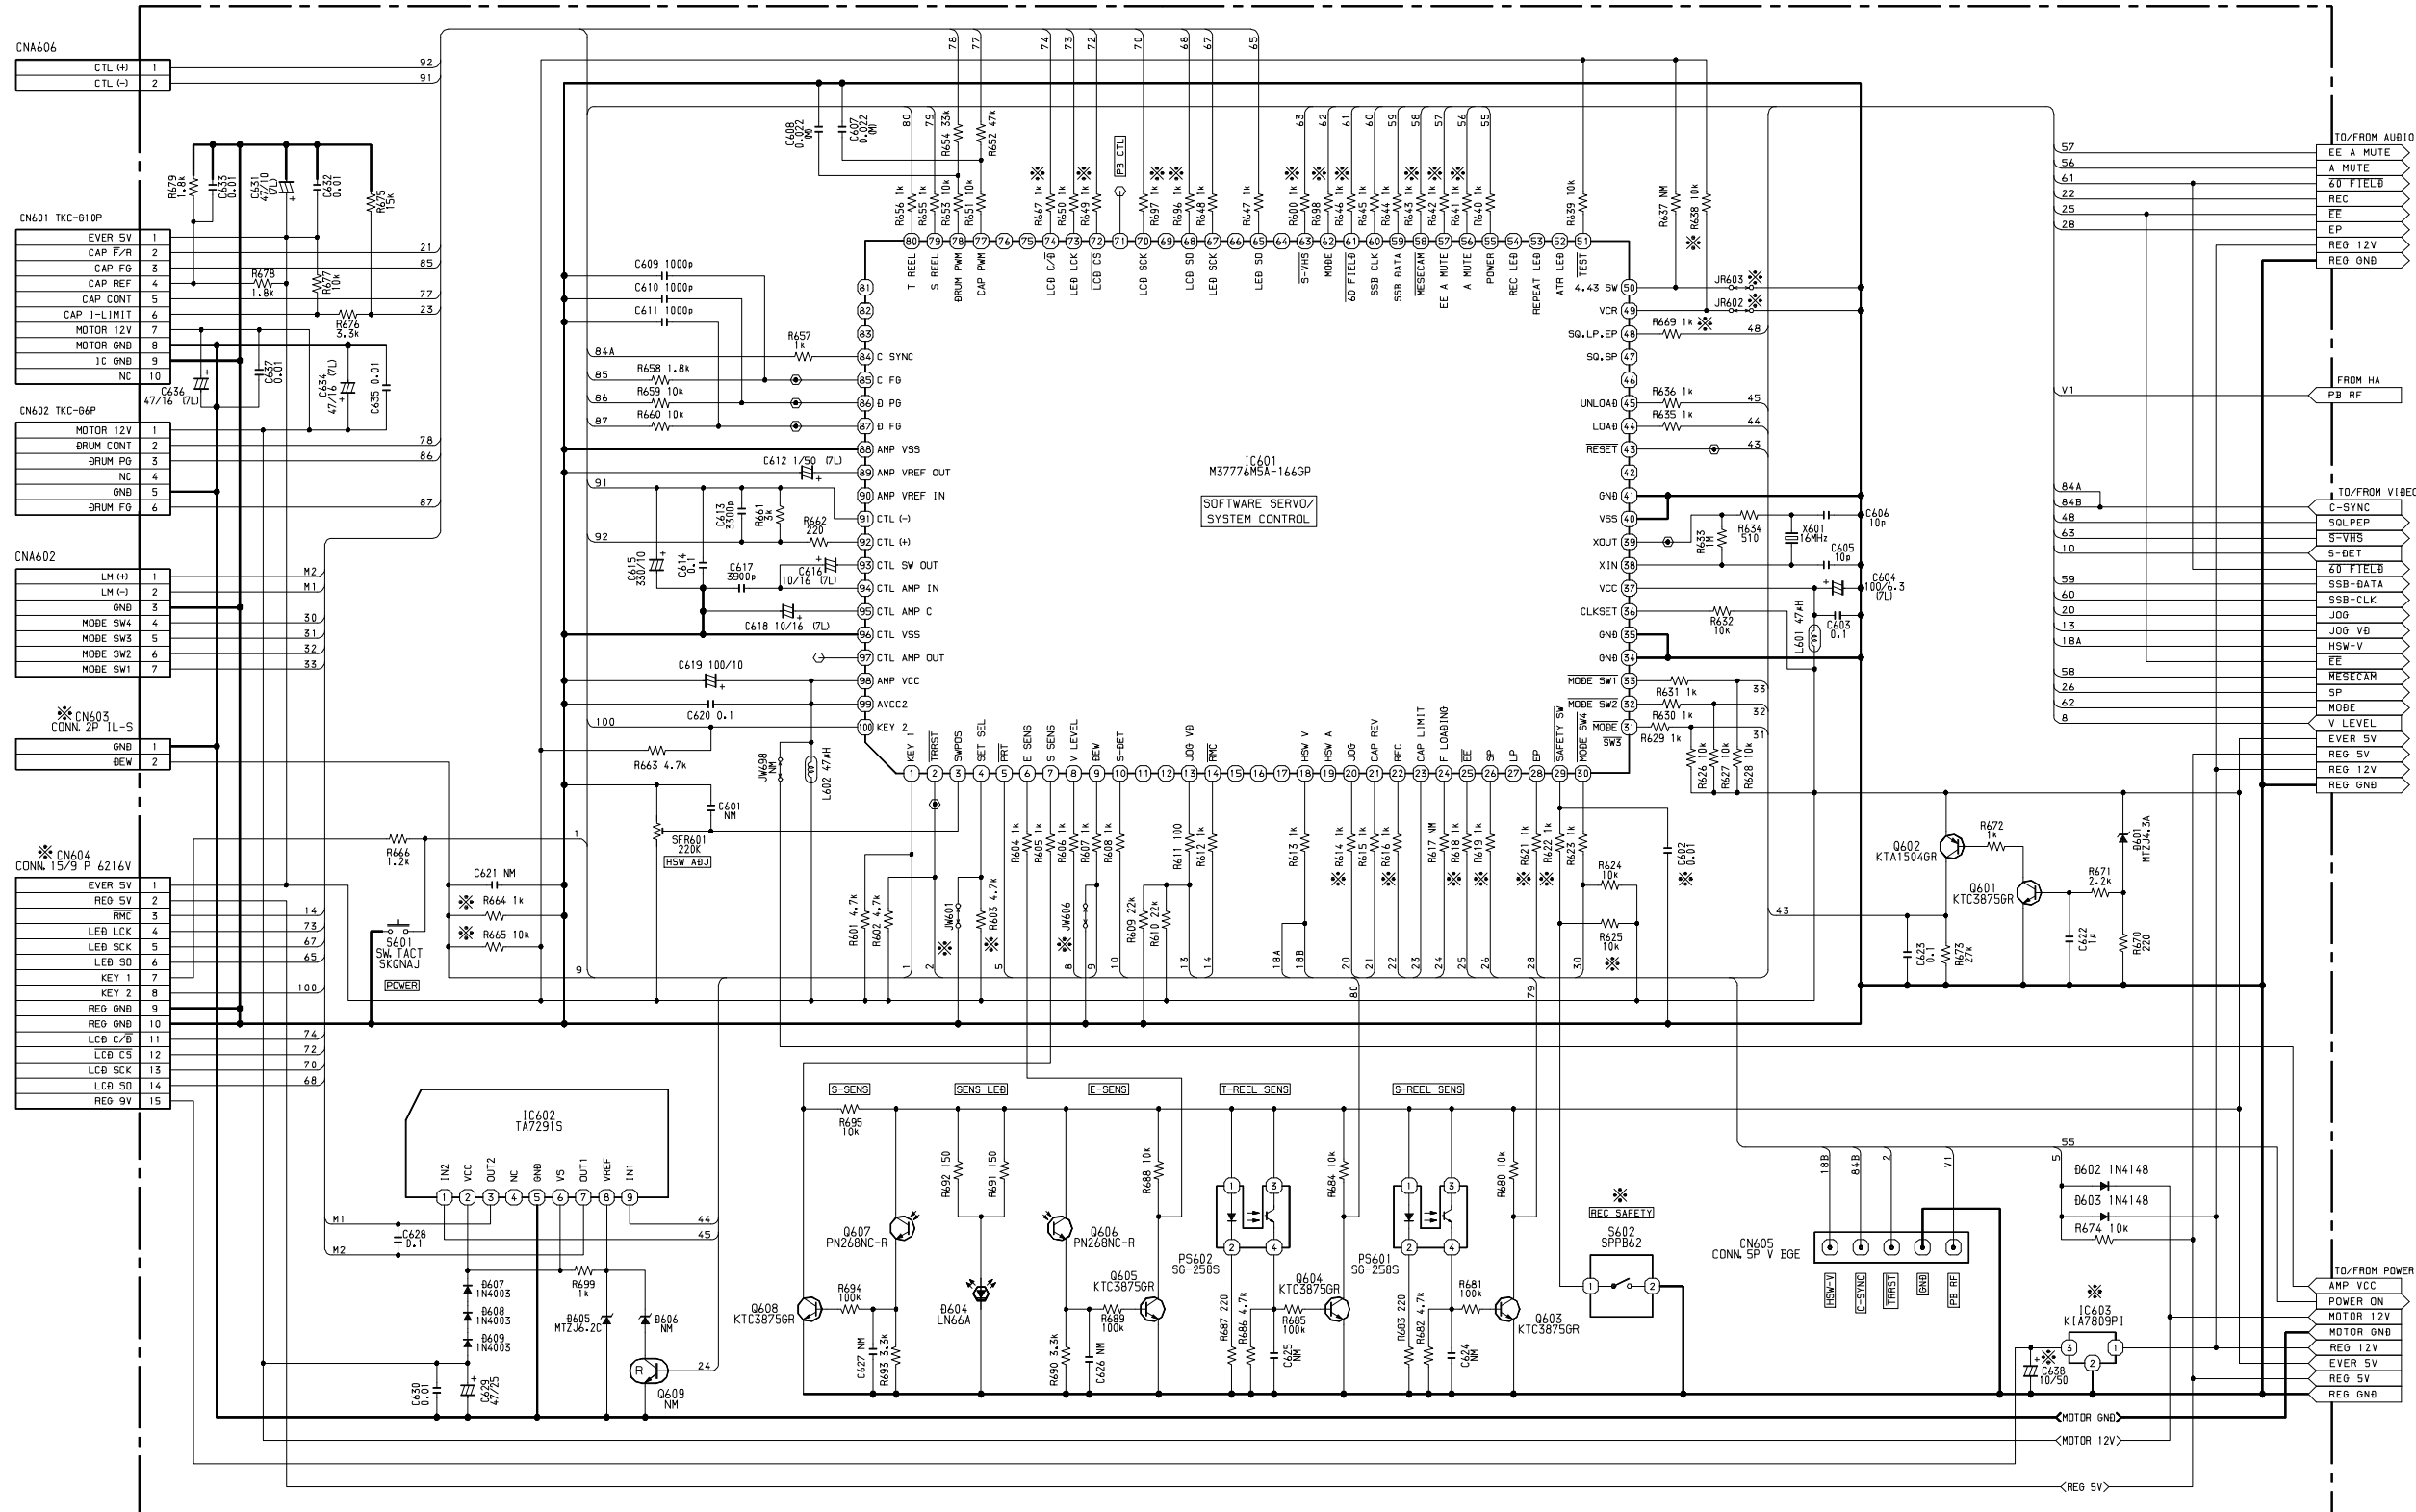

	CNA603	CNA604	C602	C638	IC603	JW601	JW606	JR602	JR603	R600	R603	R616	R619	R621	R622	R625	R638	R641	R642	R643	R646	R649	R644	R645	R647	R649	R697	R698	R614	R618	S602	
BJP-6	X	CONN. 1SP	O	O	O	O	O	X	O	X	X	O	X	X	O	O	O	O	O	O	O	O	O	O	X	X	O	O	O	O	O	O
BJP-8	X	CONN. 9P	O	X	O	O	O	X	O	X	X	O	X	X	O	O	O	O	O	O	O	X	X	X	X	X	X	X	X	X	X	O
BJP-9	X	CONN. 9P	X	X	X	O	O	O	O	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
BJP-16	X	CONN. 1SP	O	O	O	O	O	X	X	O	O	O	O	O	O	O	O	O	O	O	X	X	X	X	X	X	O	O	O	O	O	O
BJP-17	X	CONN. 1SP	X	O	O	X	O	O	X	X	O	O	O	O	O	O	X	X	X	O	X	X	X	X	X	O	O	O	O	O	O	X
BJP-19 ST	O	CONN. 9P	X	X	X	X	X	O	X	O	O	O	O	O	O	O	X	X	X	O	X	X	O	O	X	X	O	X	X	X	O	X
BJP-19 TH	X	CONN. 9P	X	X	X	X	O	D	X	X	D	X	O	D	D	X	X	X	X	O	X	X	X	X	X	X	D	X	X	X	X	X
O NO MOUNT																																
X NO MOUNT																																


HV-N15ST (BJP-19ST)	
HV-CX212TH (BJP-19TH)	
HV-CX313NH (BJP-17NH)	
HV-CX515TH (BJP-16TH)	
HV-CX515NH (BJP-16NH)	
HV-CX717KE (BJP-8KE)	
HV-CX818KE (BJP-8KE)	
HV-CX888KE (BJP-8KE)	

USE MODELS

EK
KUAN
SYSCON SERVO
88 JP6 602 01
QC-88JP6-1-1

8JP-6

SCHEMATIC DIAGRAM – 6 (POWER)

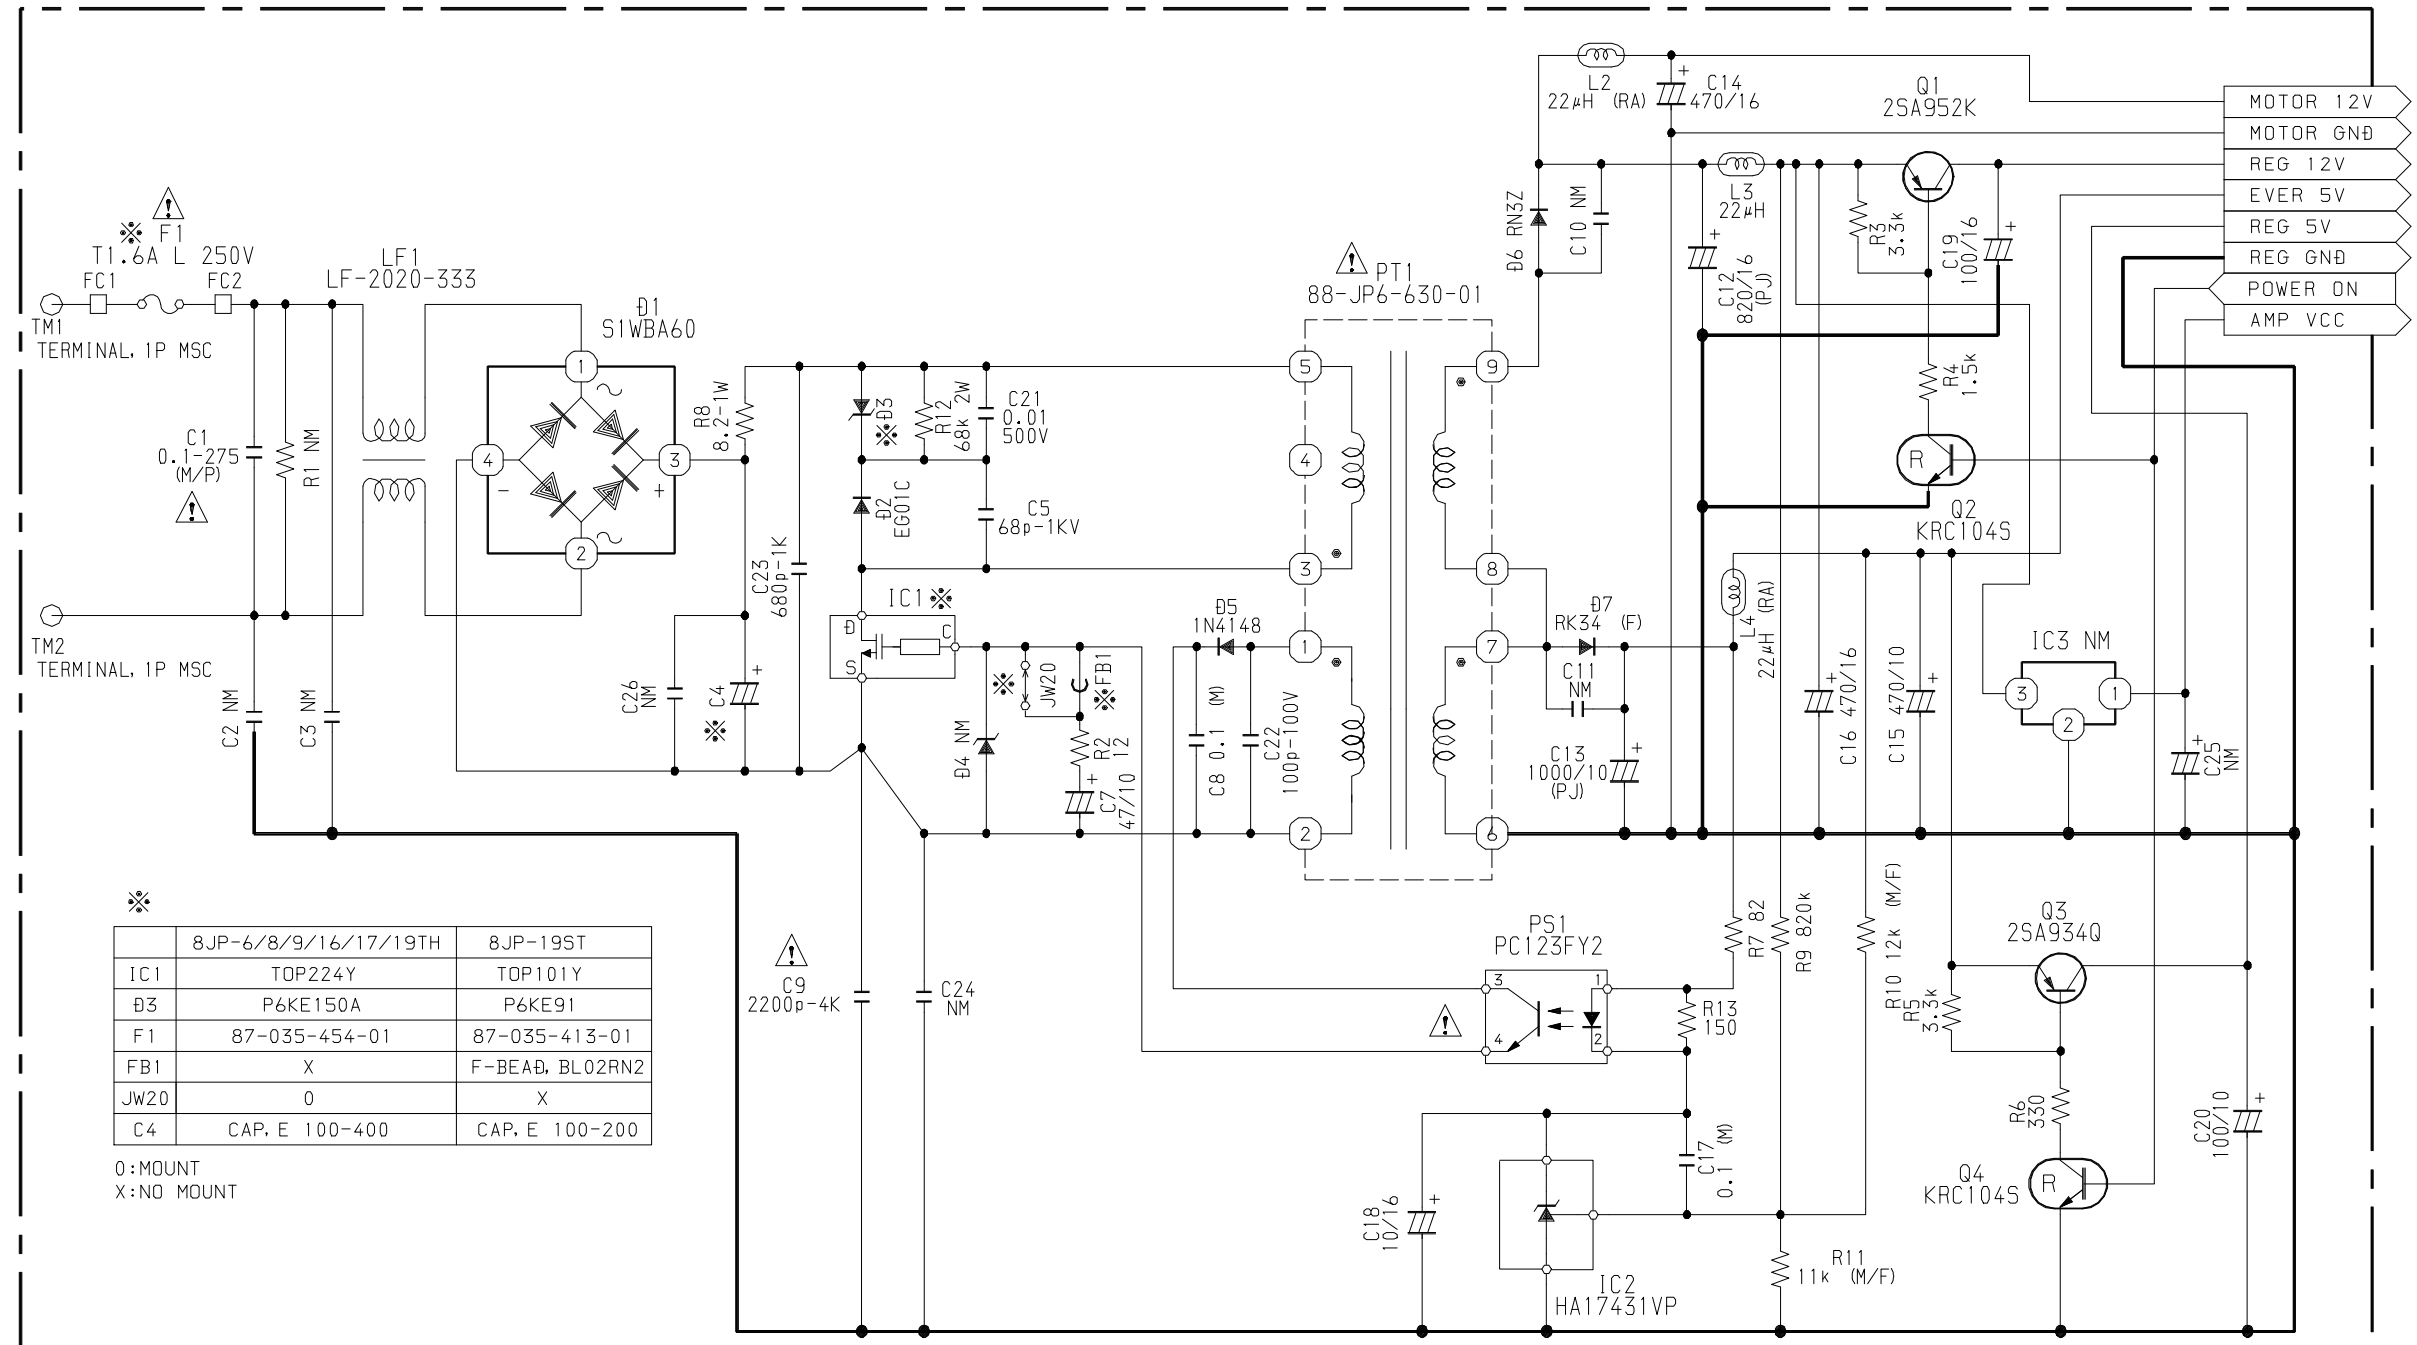

HV-N15ST	(8JP-19ST)
HV-CX212TH	(8JP-19TH)
HV-CX313NH	(8JP-17NH)
HV-CX515TH	(8JP-16TH)
HV-CX515NH	(8JP-16NH)
HV-CX717KE	(8JP-9KE)
HV-CX818KE	(8JP-8KE)
HV-CX888KE	(8JP-6KE)

USE MODELS

AJIT

POWER

88 JP6 602 11

QC-88JP6-3-2

8JP-6

B-8JP-6MA-RNØ.PS

サービス技術ニュース	
番号	連絡内容
G- —	
G- —	
G- —	

アイワ株式会社
AIWA CO.,LTD.

9820527

Tokyo Japan